

Curtis Lighting, Inc.
Chicago Sales Office
600 W. Jackson Blvd.
Franklin 8136 Chicago, 6

CURTIS

CATALOG
47

LIGHTING
INC.

A.I.A. FILE NO. 31-F



EXCHANGE NATIONAL BANK, CHICAGO

FLUORESCENT AND INCANDESCENT LIGHTING EQUIPMENT


"Forty-Sixty" Luminaires . . . pp. 2 and 3
SkyLux Luminaires 4 and 5
StarLux and 70610-XE Units 6

Fluorescent Troffers 7
Fluorescent CurtiStrip 8-9-10 and 11
Incandescent Recessed Lighting . . . 12 and 13

Incandescent "X-Ray" Reflectors . . 14
Illumination Design Data 15
"Eye-Comfort" Luminaires 16

A.I.A. FILE NO. 31-F

CURTIS "Forty-Sixty" LUMINAIRE

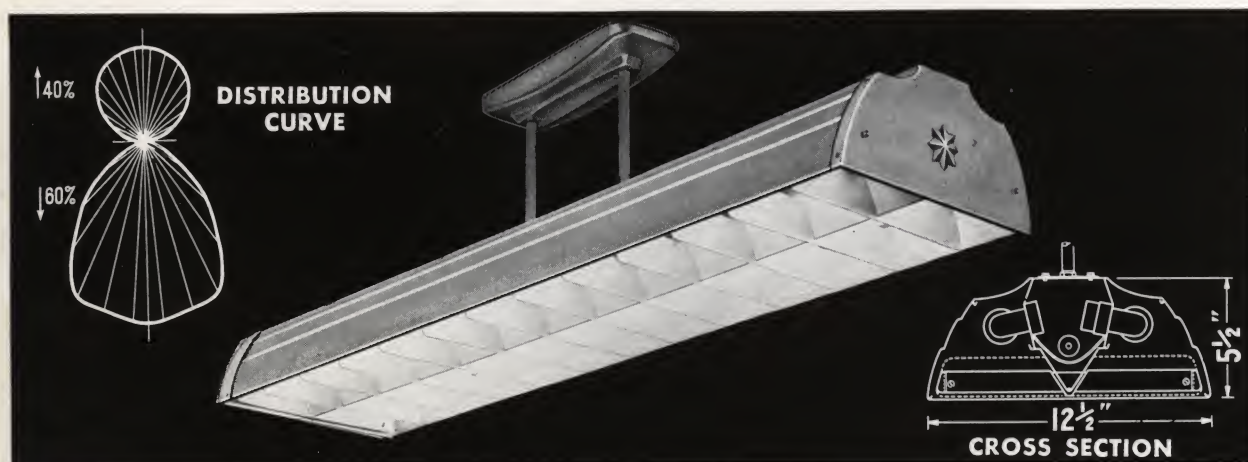


For Two 40-watt Fluorescent Lamps

The "Forty-Sixty" is designed for eye comfort. The low brightness of the luminaire blends with the illuminated ceiling, producing a comfortable field of vision. High levels of illumination without distracting and harmful glare are readily attained with this unit.

Application: Particularly recommended for offices, classrooms and drafting rooms.

Light Control: The ceiling is illuminated by an indirect component of approximately 40% of the light output. The 60% direct component is louvered to provide 35° crosswise and 25° lengthwise shielding. Within the shielded zone maximum brightness does not exceed .3 candles per sq. in. crosswise or .6 candles per sq. in. lengthwise.

Material: Aluminum and steel. Aluminum reflectors, louver fins and canopy. Steel wiring channel, ends and hanger stems. Plastic end ornament.

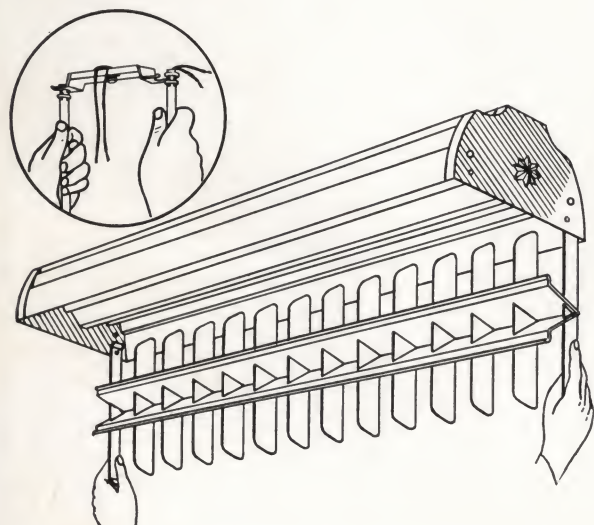

Finish: Satin Aluminum. Alzak Aluminum reflectors and louver fins. White Fluracite wiring channel and end plates. Ornamental star in Ivorytone.

Dimensions: Width, 12½"; depth of body, 5½"; length, 48¾" including ornaments; stem hanger suspension 12" ceiling to top of body. Weight installed, approximately 25 lbs. per four-foot unit.

Illumination Data: A Coefficient of Utilization chart is given below for planning the lighting layout. See page 15 for Room Index table and planning procedure.

| COEFFICIENTS OF UTILIZATION "FORTY-SIXTY" LUMINAIRE | | | | | | | | | |
|--------------------------------------------------------|------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| REFLEC- TION FACTOR | CEILING WALLS | 75% | | | 50% | | | 30% | |
| | | 50% | 30% | 10% | 50% | 30% | 10% | 30% | 10% |
| R O O M | J | .30 | .27 | .26 | .28 | .26 | .25 | .24 | .23 |
| | I | .36 | .34 | .33 | .33 | .32 | .31 | .30 | .28 |
| | H | .40 | .38 | .36 | .36 | .35 | .33 | .33 | .32 |
| | G | .43 | .41 | .39 | .40 | .37 | .36 | .35 | .34 |
| | F | .46 | .43 | .41 | .41 | .39 | .36 | .37 | .35 |
| I N D E X | E | .49 | .47 | .45 | .44 | .42 | .41 | .35 | .38 |
| | D | .52 | .49 | .47 | .46 | .45 | .43 | .41 | .40 |
| | C | .54 | .51 | .49 | .47 | .46 | .44 | .42 | .41 |
| | B | .56 | .53 | .52 | .50 | .48 | .47 | .43 | .42 |
| | A | .57 | .55 | .53 | .51 | .49 | .48 | .45 | .43 |

For average conditions a maintenance factor of 75% is suggested.



Construction: Louver is hinged and will swing down for cleaning and relamping or for access to the wiring channel. If desired, however, assembly can be completely removed by detaching two screws. Special 12" two-stem hanger permits easy installation. Other length hangers can be supplied where required. (See price list.)

Maintenance: All-metal unit with no horizontal reflecting or diffusing surfaces to collect dust . . . designed to require minimum of cleaning. Lamps may be replaced without removing the louver.

FOR OFFICES, SCHOOLS, DRAFTING ROOMS, ETC.

Continuous Luminaires: For a continuous fixture with single-stem hangers located between sections and at the ends of the run, order one 4 ft. Basic unit and as many 4 ft. Extension sections as are needed to complete the run. Basic unit is packed with two hangers for the ends, Extension section with one hanger. Wire entrance can be made through any hanger. Allow 48-3/16" on centers for spotting hangers except at ends where 44-7/16" o. c. is allowed.


If continuous fixtures are wanted with centrally located two-stem hangers, order the same unit as for individual mounting. Connectors are furnished with all units. Allow 48-3/16" o. c.

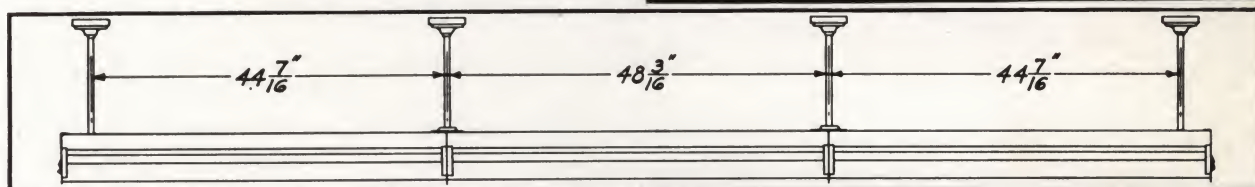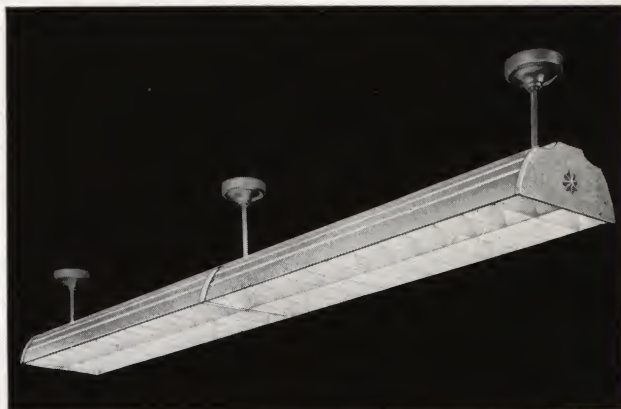

"Forty-Sixty-One" UNIT

"Forty-Sixty-One" is the 5', two 100-watt size "Forty-Sixty". This unit is identical in cross-section and construction with "Forty-Sixty" except that it is 60 3/4" long and arranged for use with two 100-watt lamps. Weight installed approximately 33 lbs. per 5' section.

Distribution is similar to that of the "Forty-Sixty". "Forty-Sixty-One" can also be furnished for continuous runs with single-stem hangers. Allow 60-3/16" on centers for spotting hangers except at ends of run where 56-7/16" is allowed.

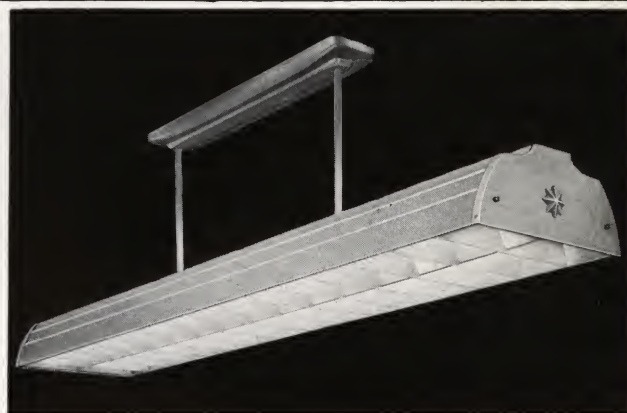

CATALOG NUMBERS FOR INDIVIDUAL AND EXTENSION UNITS

Wired: Furnished wired for 110-125 volt AC circuits with high power factor two lamp ballast and FS-4 or FS-64 starters. Total watts: 95 for 4060 series; 232 for 4061 series. See price list for wiring for other voltages or instant start ballasts.

Less lamps. Bears Underwriters' Label. Catalog numbers are for complete units carton packed with standard 12" suspension. (See price list for other suspensions. Stems for 18", 24" and 36" suspensions are carried in stock.)

| WATTS | SINGLE-STEM HANGER | | TWO-STEM HANGER | |
|-------|--------------------|-------------------|------------------------------|--------------|
| | Basic Unit | Extension Section | Individual Unit or Extension | Stem Spacing |
| 2- 40 | 4060-CB | 4060-CE | 4060-C | 7 1/2" |
| 2-100 | 4061-CB | 4061-CE | 4061-C | 21" |
| | | | | |

STANDARD FLUORESCENT *SkyLux*



TWIN SKYLUX

For Two 40-watt (48") Lamps per Section

TWIN SKYLUX luminaires are for mounting on ceiling or for suspension on hangers. Each Basic unit is a complete luminaire in itself or may be used with one or more Extension sections to make up a continuous run.

Basic Unit: A complete luminaire including decorative ornament for each end. **Extension Section:** For joining in continuous runs. Includes coupling set. Basic unit consists of this Extension section plus Catalog No. 6411 (pair end ornaments).

Wired: Furnished wired for 110-125 volt AC circuits with high power factor two-lamp ballast and FS-4 starters. Total watts: 95 (including ballast). See price list for wiring for other voltages or instant start ballasts. *Bears Underwriters' Label.*

Dimensions: Overall height, $6\frac{7}{8}$ "; width, $15\frac{3}{8}$ "; each Extension section adds $48\frac{1}{4}$ " to the total length when assembled. Basic section is $48\frac{1}{8}$ " in length.

Finish: Satin Gray and Fluracite. Moldings and end plates finished Satin Gray. Reflector and lamp shield Fluracite (white).

Installation: Designed to be mounted flush with bolts or screws or for suspension on hangers. Lead wires can be run from one unit to another. Weight installed approximately 35 lbs. per section.

CATALOG NO.

895-C

Basic Twin SkyLux

896-C*

Extension Twin SkyLux

Catalog numbers above are for complete units carton packed and wired for 110-125 volts AC. Less lamps.


* 896-C is regular 4' extension; 2' extension is Catalog No. 882-C for two 20-watt lamps.

COEFFICIENTS OF UTILIZATION

TWIN SKYLUX LUMINAIRE

| REFLECTION FACTOR | CEILING | WALLS | 75% | | | 50% | | | 30% | |
|-----------------------|---------|-------|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | 50% | 30% | 10% | 50% | 30% | 10% | 30% | 10% |
| R O O M | J | | .32 | .28 | .25 | .31 | .28 | .25 | .27 | .25 |
| | I | | .39 | .35 | .33 | .38 | .35 | .32 | .35 | .32 |
| | H | | .43 | .40 | .37 | .42 | .39 | .37 | .38 | .36 |
| | G | | .47 | .44 | .41 | .45 | .42 | .40 | .41 | .39 |
| I N D E X | F | | .50 | .47 | .43 | .47 | .45 | .42 | .44 | .42 |
| | E | | .54 | .51 | .47 | .52 | .49 | .47 | .48 | .46 |
| | D | | .58 | .54 | .51 | .55 | .52 | .50 | .51 | .49 |
| | C | | .60 | .56 | .52 | .57 | .54 | .52 | .53 | .51 |
| X | B | | .63 | .59 | .56 | .60 | .56 | .55 | .55 | .54 |
| | A | | .64 | .61 | .58 | .61 | .58 | .56 | .57 | .55 |

For average conditions a maintenance factor of 75% is suggested.

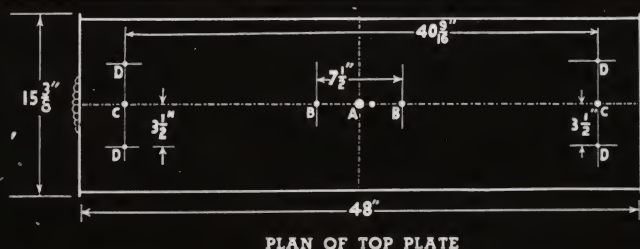

PLAN OF TOP PLATE



SIDE ELEVATION

A— $\frac{7}{8}$ " center knockout for single stem hanger or wire entrance.

B— $\frac{11}{16}$ " knockouts for two-stem hanger.


C— $\frac{11}{16}$ " knockouts of single-stem hanger, or for bridging joined sections with two-stem hanger.

D— $\frac{1}{4}$ " knockouts for surface mounting.

E—Top Molding

F—Lamp Shield

G—Bottom Molding



CROSS SECTION


FOR COMMERCIAL LIGHTING

SINGLE SKYLUX



HANGERS FOR TWIN SKYLUX

Twin Skylux can be installed with either one-stem or two-stem hangers. Order one two-stem hanger for each 48" section or order one more hanger than the number of sections in the run if one-stem hangers are to be used. See diagrams below.

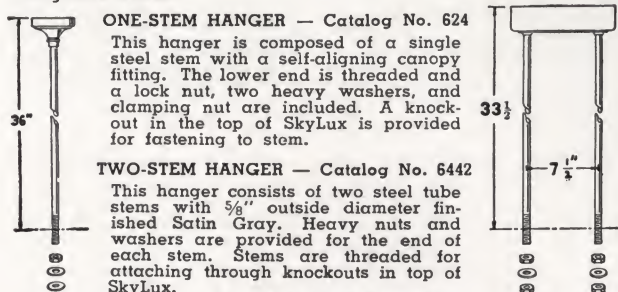


ONE-STEM HANGER — Catalog No. 624
This hanger is composed of a single steel stem with a self-aligning canopy fitting. The lower end is threaded and a lock nut, two heavy washers, and clamping nut are included. A knock-out in the top of Skylux is provided for fastening to stem.

TWO-STEM HANGER — Catalog No. 6442
This hanger consists of two steel tube stems with 5/8" outside diameter finished Satin Gray. Heavy nuts and washers are provided for the end of each stem. Stems are threaded for attaching through knockouts in top of Skylux.

HANGER EXTENSIONS

| FOR NO. 624 | FOR NO. 6442 | DESCRIPTION |
|---------------|---------------|--------------------|
| Cat. No. 6403 | Cat. No. 6401 | 12" Extension only |
| Cat. No. 6404 | Cat. No. 6402 | 24" Extension only |

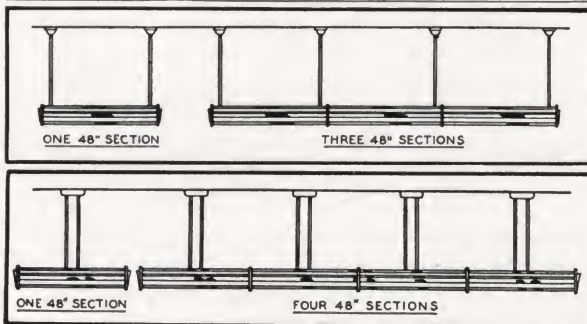

For One 40-watt (48") Lamp per Section

SINGLE SKYLUX luminaires are for mounting along the right angle juncture of the wall and ceiling, or for mounting horizontally on the wall below the ceiling line. Each Basic unit is a complete luminaire in itself or may be used with one or more Extension sections to make a continuous unit.

Basic Unit: A complete luminaire including ornament for each end. **Extension Section:** Identical with Basic unit, but includes parts for joining to Basic unit or other Extension sections. Less end ornaments.

Wired: Furnished wired for 110-125 volt AC circuits with high power factor single lamp ballast and FS-4 starter. Total watts, 51 (including ballast). See price list for wiring with other voltages or ballasts. Bears Underwriters' Label.

Dimensions: Overall height 7"; width 8 1/2"; each Basic section is 48 3/4" in length and each Extension section used will add 48 1/4" to the total length when assembled.

Finish: Satin Gray and Fluracite. Moldings and end plates finished Satin Gray. Reflector and lamp shield Fluracite (white).

| CATALOG NO. | DESCRIPTION |
|-------------|-------------------------|
| 891-C | Basic Single Skylux |
| 892-C | Extension Single Skylux |

Catalog numbers above are for complete units, carton packed and wired for 110-125 volts AC. Less lamps.


SQUARE INCANDESCENT SURFACE LUMINAIRES

For Use With Twin Skylux

Catalog No. 2230 is suggested where it is desired to provide increased down lighting in a Skylux run. Distribution is semi-concentrating. Its use permits many interesting ceiling patterns, such as squares, crosses, etc. Twin Skylux units can be bolted to any or all of the four sides of the unit.

Construction: Made of steel finished Satin Gray with concealed Alzak Aluminum reflector for 200- or 300-watt Medium Base incandescent lamp. A decorative pattern louver in a hinged frame shields the lamp. There is a wire entrance hole and screw holes for mounting on ceiling and each side has one wire entrance hole and two screw holes for joining to Twin Skylux. One Catalog No. 6411 (pair of Skylux end ornaments) is included with each unit to cover holes in exposed sides.

Dimensions: Depth 8", Louver projects 7/8". Housing is 16" square; door 16 1/2" square.

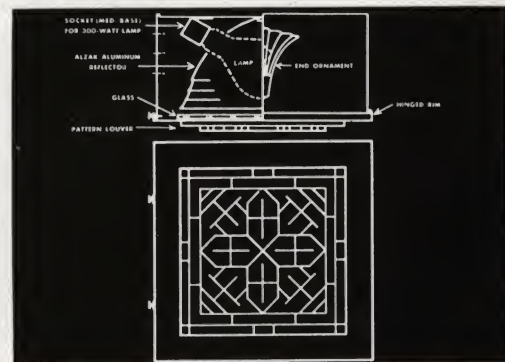

StarLux FLUORESCENT LUMINAIRE

CATALOG No. 1400

For Four 40-watt (48") Lamps

StarLux is an attractive four-lamp luminaire of high overall efficiency and low brightness, for use as an individual pendant or in continuous runs.

Appearance: Circular canopy offers a pleasing contrast with the straight lines which predominate. Finish is Satin Gray with white Fluracite louver and sanded glass panels.

Construction: Interior finished in efficient, durable Fluracite for highest reflectivity. Diffusing glass panels easily removed for cleaning. Lamps accessible without removing glass. Louver swings down for access to lower lamps. Canopy conceals heavy supporting bridge. Cat. No. GX-207 replacement glass panel.


Dimensions: Width, 14"; depth, 6 $\frac{1}{8}$ "; length, 49 $\frac{1}{4}$ "; suspension 34" to top of body. Weight installed approximately 47 lbs. per section.

Hanger Extensions: Catalog No. 6401 adds 12" to hanger length, Catalog No. 6402 adds 24".

Continuous Luminaires: The same unit is ordered for individual or continuous runs. Connectors are furnished with all units. End ornaments are removable and knockouts in end plates permit continuous wiring. Allow 48-5/16" length per unit in spotting hangers.

Wired: Furnished wired for 110-125 volt AC circuits with high power factor two lamp ballasts and FS-4 starters. Total watts, 191 (including ballasts). See price lists for wiring for other voltages or instant start ballasts. Bears Underwriters' Label.

Catalog No. 1400: Complete four-lamp StarLux with standard 36" hangers carton packed and wired for 110-125 volt AC. Less lamps.

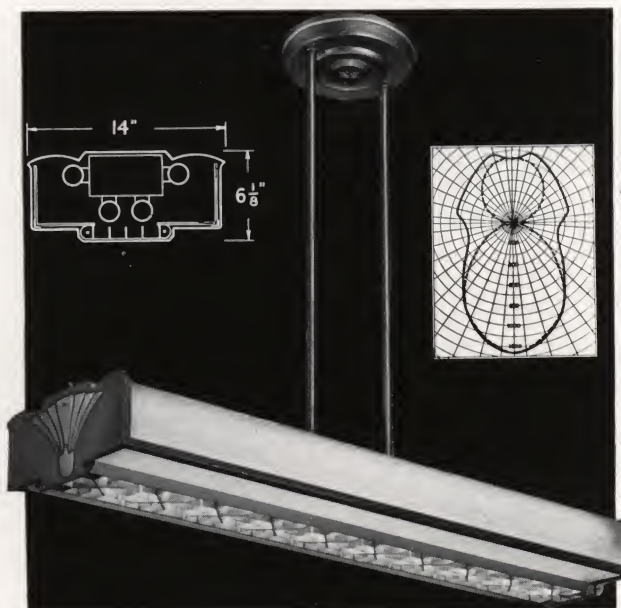

COEFFICIENTS of UTILIZATION

STARLUX LUMINAIRE


| REFLECTION FACTOR | Ceiling Walls | 75% | | | 50% | | | 30% | | |
|-----------------------|------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% |
| R O O M | I | .24 | .20 | .18 | .21 | .19 | .17 | .17 | .17 | .16 |
| | I | .29 | .26 | .24 | .26 | .23 | .22 | .22 | .22 | .20 |
| | H | .32 | .29 | .27 | .29 | .26 | .25 | .24 | .24 | .22 |
| | G | .36 | .32 | .30 | .32 | .29 | .26 | .26 | .26 | .25 |
| | F | .38 | .35 | .32 | .34 | .31 | .29 | .28 | .28 | .27 |
| | E | .42 | .39 | .36 | .37 | .34 | .32 | .31 | .31 | .29 |
| I N D E X | D | .45 | .41 | .38 | .39 | .36 | .35 | .33 | .33 | .32 |
| | C | .47 | .44 | .40 | .41 | .38 | .36 | .34 | .34 | .33 |
| | B | .50 | .47 | .44 | .43 | .40 | .39 | .36 | .36 | .35 |
| | A | .52 | .48 | .46 | .45 | .42 | .40 | .37 | .37 | .36 |

For Average Conditions, a Maintenance Factor of 70% Is Suggested.

FLUORESCENT LUMINAIRE NO. 70610-XE

For Four 40-watt (48") Lamps

NO. 70610-XE is a four-lamp fluorescent ceiling luminaire of exceptionally decorative and impressive design. This unit is large enough to be suitable for a large interior and of sufficiently low surface brightness for mounting on a low ceiling.

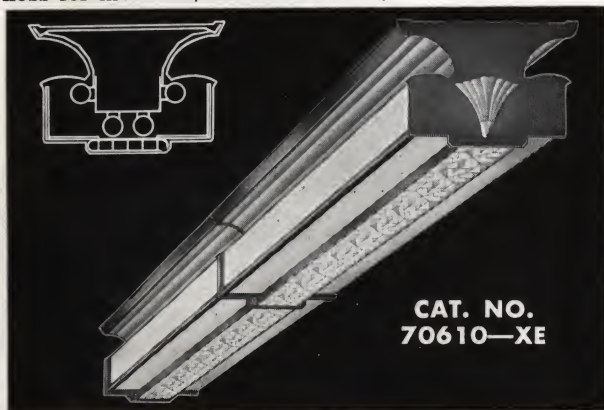

Material and Finish: Made of steel and crystal glass, panels lightly sanded one side. Ceiling molding and end plates Satin Gray. End ornaments are Satin Aluminum. All reflecting surfaces and pattern louver are finished white Fluracite.


Maintenance: Diffusing glass panels easily removed for cleaning. Lamps accessible without removing glass. Louver swings down for access to lower lamps. Replacement glass panel is GX-207.

Continuous Luminaires: The same unit is ordered for individual or continuous runs. Connectors are furnished with all units. End ornaments are removable and knockout in end plates permit continuous wiring. Allow 48-5/16" length in spotting hangers. Weight installed approximately 60 lbs. per section.

Dimensions: Length 49 $\frac{1}{4}$ " including end ornaments. Width, 15 $\frac{1}{2}$ " at ceiling. Depth, 10 $\frac{1}{8}$ ".

Wired: Furnished wired for 110-125 volts AC circuits with high power factor two lamp ballasts and FS-4 starters. Total watts, 191 (incl. ballasts). See price list for wiring for other voltages or instant start ballasts. Bears Underwriters' Label.

Catalog No. 70610-XE: Complete four-lamp ceiling luminaire packed and wired for 110-125 volts AC. Less lamps.

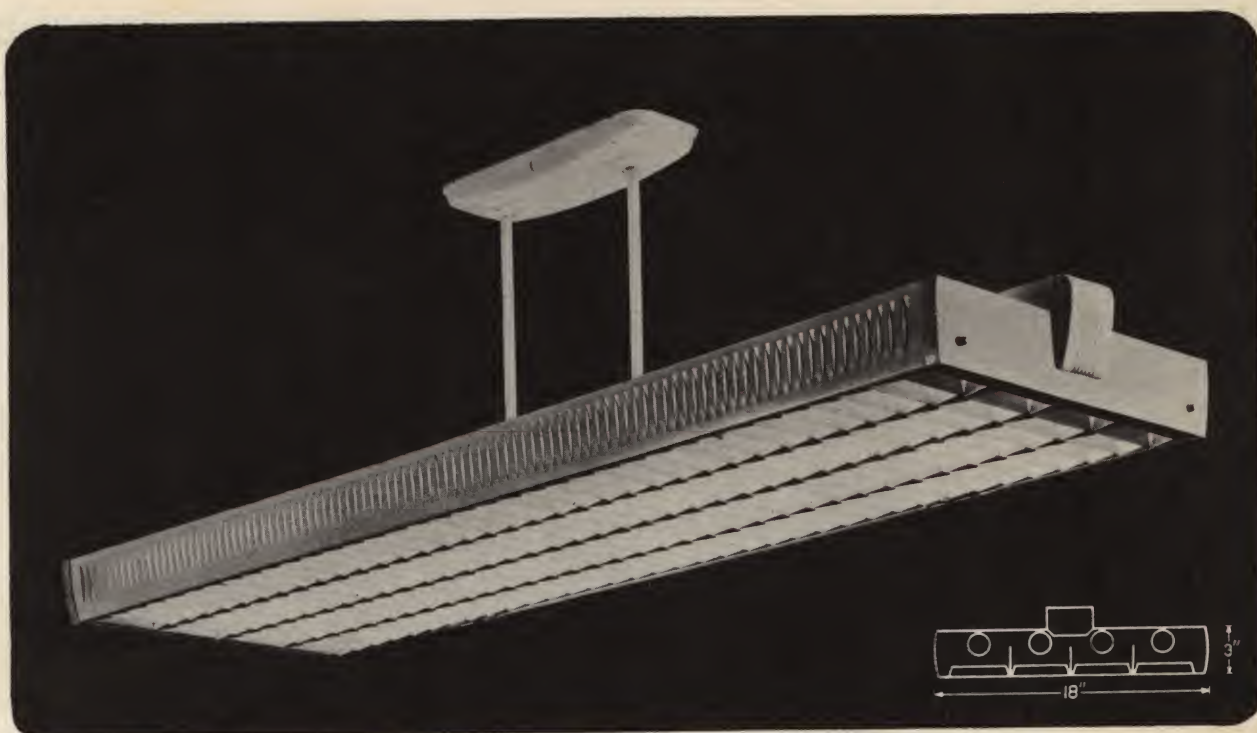

"Anniversary" Luminaire

CATALOG NO. 51

For four 40-watt lamps per section. Recommended for both store and office lighting, the "Anniversary" Luminaire can be used either as an individual unit or in continuous runs. It is an all metal unit with a very shallow body of 3". Side panels are designed so that lamps are louvered and reflected light is utilized to illuminate and create a decorative effect. The graceful modern appearance is enhanced by the distinctive dart pattern visible from the underside of the luminaire.

The "Anniversary" Luminaire is of the general

diffusing type with the top completely open for better utilization of the indirect component. The direct component is shielded 30° lengthwise and crosswise by the attractive one piece louver.

MATERIAL AND FINISH: Made of steel with reflecting surfaces and louver finished white "Fluracite". End plates and hanger finished light gray.

DIMENSIONS: Width, 18"; overall depth, 4 1/2"; depth of body, 3"; length, including end ornament, 51 1/2". Standard suspension is 12", but stems for 18", 24", 36" and 48" suspensions are carried in stock. Net weight is 33 lbs.

CATALOG NUMBERS FOR INDIVIDUAL AND EXTENSION UNITS

WIRED: Furnished wired for 110-125 volt A.C. current with high power factor two-lamp ballast and FS-4 starters. Total watts: 198. Can be wired with other voltages. Prices on appli-

cation. Less lamps. Bears Underwriter's Label. Catalog numbers given below are complete units including hangers for 12" suspension. Hangers and bodies are available separately.

| WATTS | SINGLE-STEM HANGER | | TWO-STEM HANGER | |
|-------|--------------------|-------------------|------------------------------|--------------|
| | Basic Unit | Extension Section | Individual Unit or Extension | Stem Spacing |
| 4-40 | 51-CB | 51-CE | 51-C | 7 1/2" |
| | | | | |

ILLUMINATION DATA: The E.T.L. photometric curve is reproduced below. The Coefficients of Utilization table given is derived from this curve.

CANDLEPOWER DISTRIBUTION: The candlepower distribution of the "51" luminaire is such that only 5.4% of the bare lamp lumens are delivered in the 60°-90° zone. By keeping light in this zone at a low value, seeing comfort is greatly increased.


EFFICIENCY: Light output of the "51" is such that this unit is classified as a "general diffuse lighting type fluorescent luminaire" under the Fleur-O-Lier standard specification No. 3. This specification requires a minimum overall efficiency of 65% of bare lamp lumens. The "51" has an efficiency of 78.3%.

BRIGHTNESS: Fleur-O-Lier specification No. 3 states that the brightness within the shielded zone shall not exceed 2.66 candles per square inch (1200 foot-lamberts). The maximum brightness within the shielded zone of the "51" luminaire is 1.5 candles per square inch (678 foot-lamberts).

INSTALLATION AND MAINTENANCE: Curtis hangers permit simplified installation. Lamps and starters can be changed from above without opening the louver. Louver is hinged on both sides and is easily removed.

Since there are no horizontal reflectors or diffusing surfaces to collect dust, maintenance costs are inherently low.

PACKING INFORMATION: Unit is packed complete, less hanger, in a specially designed carton. Hanger is packed separately. Catalog number for chassis only is 51-CLH.

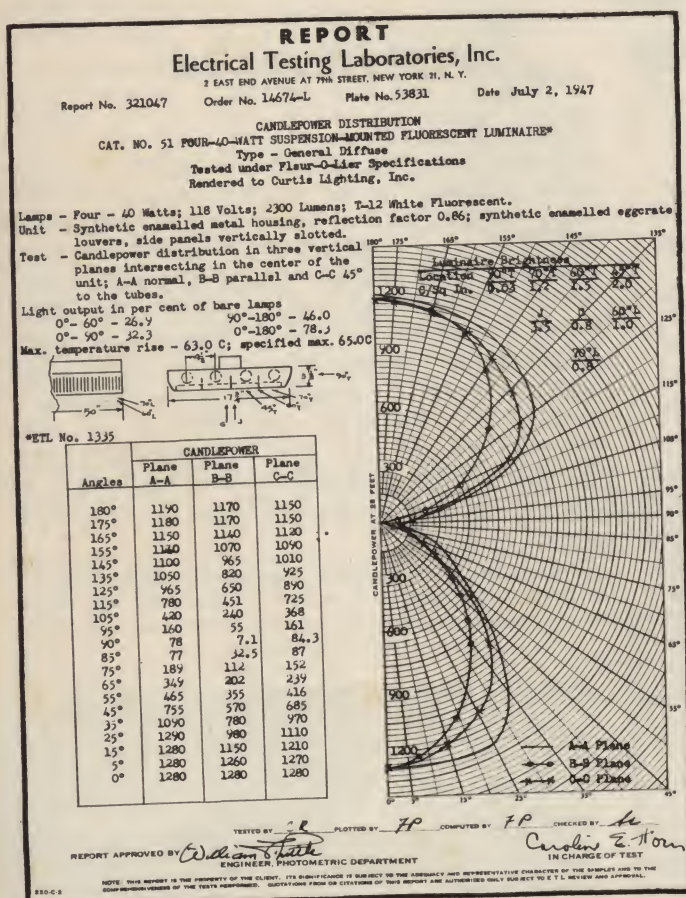

| COEFFICIENTS OF UTILIZATION "ANNIVERSARY" LUMINAIRE CATALOG NO. 51 | | | | | | | | |
|--------------------------------------------------------------------------|---------|-----|-----|-----|-----|-----|-----|-----|
| REFLEC- TION FACTOR | CEILING | 75% | | | 50% | | | 30% |
| | | 50% | 30% | 10% | 50% | 30% | 10% | 30% |
| R O O M I N D E X | J | .26 | .22 | .21 | .22 | .20 | .19 | .17 |
| | I | .32 | .28 | .27 | .28 | .25 | .23 | .21 |
| | H | .35 | .32 | .30 | .30 | .28 | .27 | .23 |
| | G | .39 | .36 | .33 | .34 | .31 | .29 | .26 |
| | F | .42 | .38 | .35 | .35 | .33 | .31 | .27 |
| | E | .45 | .42 | .39 | .39 | .36 | .34 | .30 |
| | D | .49 | .45 | .43 | .41 | .39 | .37 | .32 |
| | C | .51 | .48 | .45 | .43 | .40 | .39 | .33 |
| | B | .54 | .51 | .49 | .45 | .43 | .41 | .36 |
| | A | .56 | .53 | .51 | .47 | .44 | .43 | .36 |

For average conditions a maintenance factor of 75% is suggested.

PRINTED IN U.S.A.

SERIAL NO. 2215

CURTIS LIGHTING, INC.


6135 W. 65TH STREET • CHICAGO 38, ILLINOIS

NEW YORK


TORONTO

FLUORESCENT RECESSED TROFFERS

For 2 or 3 40-watt Lamps per Section



**TWO-SECTION
LOUVERED TROFFER**

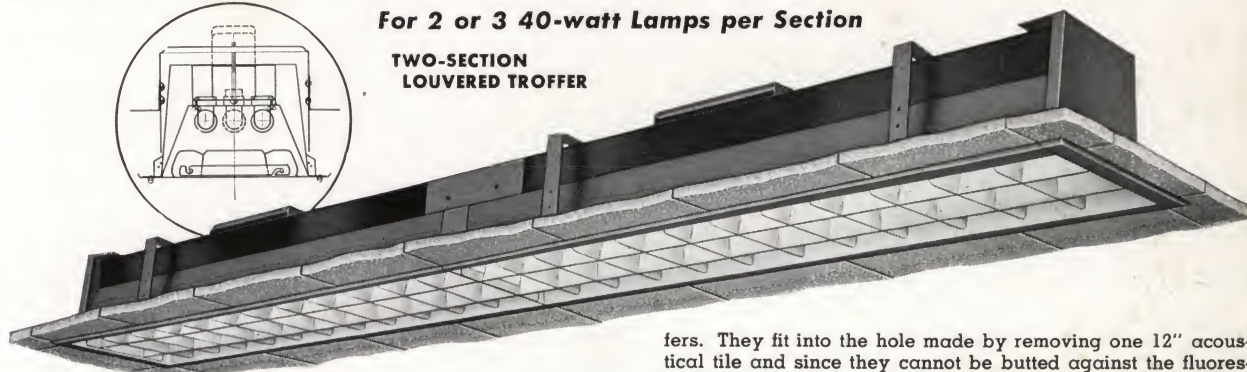

These troffers are of three general types (see below). They are equipped with side and end flanges and are easy to install in any type ceiling including T-Bar construction; however, the T-Bar clips are not used to support the unit.

General Construction Features: Wireway is suspended from "U" shape support brackets which are readily adjustable for thickness of framing and plaster or acoustical material. Reflectors are assembled to wireway with wing nuts and complete unit is drawn up to ceiling with long bolts. Sections can be wired together in lengths convenient for installation and installed as a unit. In general, one wire entrance will be sufficient for the entire run.

Dimensions: Each unit is 48" long and fits into a 12" slot in the ceiling. This permits alignment of reflectors with acoustical ceiling patterns. Width at bottom over flanges 13 1/4". Depth above finished ceiling required for recessing 9 1/4" for the two-lamp units, 10 1/2" for the three-lamp units.

Wired: Furnished wired for 110-125 volt AC circuits with high power factor ballasts and FS-40 starters. Total watts per 4' section: 95 for 2 lamp units, 143 for 3 lamp units. See price list for wiring for other voltages or ballasts. Less Lamps. Bears Underwriters' Recessing Label.

Illumination Data: For locations where minimum luminaire brightness at normal viewing angles is desired specify Curtis Alzak Aluminum Troffers. Brightness of the economy Fluracite Steel Louvered Troffers and the Glass Panel Troffers is moderate and sufficiently low for many applications.

The table below gives footcandle intensities where two-lamp Curtis Troffers are used in continuous rows. It may be used with all three type troffers.

| Spacing of Two-Lamp* Troffers Installed in Continuous Rows. | | Footcandles Maintained (25% depreciation factor) Using 48", 2300 lumen lamp. |
|----------------------------------------------------------------|--------------|------------------------------------------------------------------------------------|
| Large Room** | Small Room** | |
| 3' | 2' | 100 to 125 f.c. |
| 4' | 3' | 80 to 100 f.c. |
| 5' | 4' | 65 to 70 f.c. |
| 6' | 4 1/2' | 50 to 60 f.c. |
| 8' | 6' | 40 to 50 f.c. |

*If three-lamp troffers are to be used add 30% to footcandle values given. **In a large room width is about 4 times height; in a small room width is approximately equal to height.

Matching Incandescent Units: The square type Incandescent Recessed Units are styled to match these trof-


fers. They fit into the hole made by removing one 12" acoustical tile and since they cannot be butted against the fluorescent troffer it is recommended that one complete tile be skipped between the end of the troffer and the incandescent unit. Spotlighting effects and many interesting ceiling patterns are possible. (See page 12 for listing).

ALZAK ALUMINUM TROFFERS **With Aluminum Reflector and Louver** **Alzak Aluminum Finish**


For low brightness and high efficiency these Alzak Aluminum Troffers are unexcelled. Reflectors and louvers are of diffuse Alzak Aluminum for better light control. Wireways, etc., of heavy gauge steel for strength. Weight is 24 lbs. per 4' section. Louvers are of the swing down type and provide shielding 35° crosswise and 25° lengthwise.

FLURACITE FINISH ALL-STEEL TROFFERS **With Steel Reflector and Louver** **White "Fluracite" Finish**

Less expensive than the Aluminum reflector troffers but incorporating the same construction features these Fluracite finish troffers are designed for high utilization of light and easy maintenance. Weight, 33 lbs. per 4' section. Louvers are of the swing down type and provide shielding 35° crosswise and 25° lengthwise.

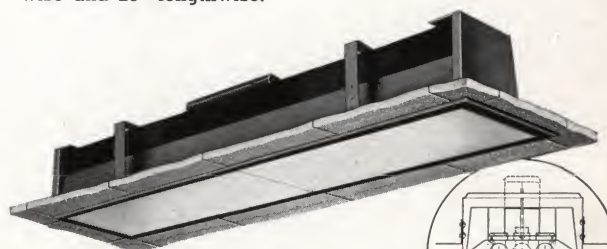

**ONE-SECTION
GLASS PANEL TROFFER**



With Steel Reflector and Sliding Glass Panels **White "Fluracite" Finish**



Where troffers are wanted with glass panels these units are recommended. General construction is the same as the louvered types. Weight, 36 lbs. per 4' section. Glass panels are of diffusing glass so arranged as to slide over each other for maintenance. Panels can be quickly removed.

| Catalog Nos. are for Basic and Extension sections, wired and carton packed complete. Less lamps. | | | | | | |
|--------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|----------------------------------------|--------------------------|-------------------------------------------|--------------------------|
| No. of Lamps per section. | Alzak Aluminum Louvered Troffers | | "Fluracite" Steel Louvered Troffers | | "Fluracite" Steel Glass Panel Troffers | |
| | Catalog No. Basic Unit | Catalog No. Extension | Catalog No. Basic Unit | Catalog No. Extension | Catalog No. Basic Unit | Catalog No. Extension |
| 2-20 Watt | 1712-C 2' | * | 1722-C 2' | * | 1752-C 2' | * |
| 2-40 Watt | 1712-C 4' | 1712-CE 4' | 1722-C 4' | 1722-CE 4' | 1752-C 4' | 1752-CE 4' |
| 3-20 Watt | 1713-C 2' | * | 1723-C 2' | * | 1753-C 2' | * |
| 3-40 Watt | 1713-C 4' | 1713-CE 4' | 1723-C 4' | 1723-CE 4' | 1753-C 4' | 1753-CE 4' |

* 2' basic units are 24" long for use with standard 4' extensions.

FLUORESCENT CURTISTRIP

COMPLETE WIRED UNITS

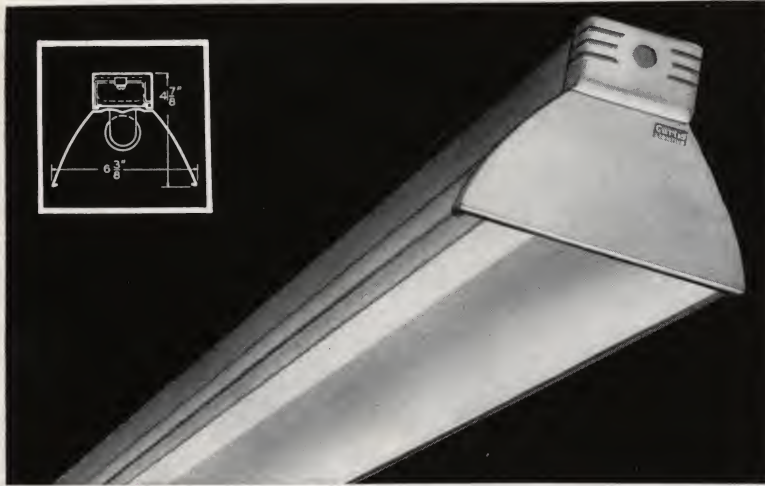

COEFFICIENTS OF UTILIZATION

DEEP REFLECTOR (FLURACITE)

| REFLECTION FACTOR | CEILING | 75% | | | 50% | | | 30% | |
|-----------------------------------------------|---------|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 50% | 30% | 10% | 50% | 30% | 10% | 30% | 10% |
| R O O M I N D E X | J | .38 | .33 | .30 | .37 | .33 | .30 | .32 | .30 |
| | I | .46 | .42 | .40 | .45 | .41 | .39 | .41 | .39 |
| | H | .50 | .47 | .45 | .49 | .47 | .44 | .46 | .44 |
| | G | .54 | .50 | .48 | .53 | .50 | .48 | .49 | .48 |
| | F | .57 | .54 | .50 | .55 | .53 | .50 | .52 | .50 |
| | E | .61 | .58 | .55 | .59 | .57 | .55 | .56 | .55 |
| | D | .65 | .62 | .59 | .63 | .61 | .59 | .60 | .59 |
| | C | .67 | .64 | .61 | .65 | .62 | .61 | .62 | .60 |
| | B | .69 | .66 | .65 | .67 | .65 | .64 | .64 | .63 |
| | A | .70 | .68 | .66 | .68 | .66 | .65 | .65 | .64 |

For average conditions a maintenance factor of 75% is suggested.

Fluorescent CurtiStrip is neat and attractive, adapted to a variety of commercial and industrial lighting tasks. CurtiStrip Wiring Channel forms the rigid backbone of these units.

Wired and assembled complete with High Power Factor Ballasts, lampholders and starters. **Carton Packed** in single lamp sections and 8-ft. sections with 2 lamp ballasts. These units need only to be joined together, lamped and connected to the line. **Bears Underwriters' Label.**

Dimensions: For cross sections see diagrams. Length: Two decorative end caps add $\frac{3}{4}$ " to nominal length of fixture. Two No. 46 end caps add 1". Thus actual overall length of a 32' fixture is 32' $\frac{3}{4}$ " if decorative type, 32' 1" if economy type.

Mounting and Suspension: In mounting on any flat surface for suspension with brackets or hangers. (See next page.)


Decorative Type: Has Satin Silvertone Channel and end pieces, White Fluracite Reflectors, decorative channel end caps and closed reflector ends.

Economy Type: Has plain rust-resisting-finish channel and white Fluracite Reflectors, No. 46 end caps for conduit connection and open reflector ends.

DEEP REFLECTOR FIXTURES have semi-concentrating Fluracite Reflectors. They are intended for general lighting or localized direct lighting over counters, cases and worktables. These Deep Reflector fixtures can also be furnished with **Alzak Aluminum reflectors** at increased cost. See price list. Order Catalog No. 973-C in place of 940-C or 974-C in place of 942-C for Alzak units.


| Catalog No. | | Nominal Length | Lamps Required |
|-----------------|--------------|----------------|-------------------|
| Decorative Type | Economy Type | | |
| 940-C 1 1/2' | 942-C 1 1/2' | 18" | 15 Watt |
| 940-C 2' | 942-C 2' | 2' | 20 Watt |
| 940-C 3' | 942-C 3' | 3' | 30 Watt |
| 940-C 4' | 942-C 4' | 4' | 40 Watt |
| 940-C* 2' | 942-C* 2' | Continuous | 2 or more 40 Watt |
| 940-CE 2't | 942-CE 2't | 2' | 20 Watt |

ASYMMETRIC REFLECTOR FIXTURES direct the light to one side. They are for lighting sloping and vertical surfaces and for show window and cove applications.




| Catalog No. | | Nominal Length | Lamps Required |
|-----------------|--------------|----------------|-------------------|
| Decorative Type | Economy Type | | |
| 948-C 1 1/2' | 950-C 1 1/2' | 18" | 15 Watt |
| 948-C 2' | 950-C 2' | 2' | 20 Watt |
| 948-C 3' | 950-C 3' | 3' | 30 Watt |
| 948-C 4' | 950-C 4' | 4' | 40 Watt |
| 948-C* 2' | 950-C* 2' | Continuous | 2 or more 40 Watt |
| 948-CE 2't | 950-CE 2't | 2' | 20 Watt |

SHALLOW REFLECTOR FIXTURES have distributing Fluracite Reflectors. They are for general lighting, local lighting when mounted below eye level and for indirect lighting.




| Catalog No. | | Nominal Length | Lamps Required |
|-----------------|--------------|----------------|-------------------|
| Decorative Type | Economy Type | | |
| 944-C 1 1/2' | 946-C 1 1/2' | 18" | 15 Watt |
| 944-C 2' | 946-C 2' | 2' | 20 Watt |
| 944-C 3' | 946-C 3' | 3' | 30 Watt |
| 944-C 4' | 946-C 4' | 4' | 40 Watt |
| 944-C* 2' | 946-C* 2' | Continuous | 2 or more 40 Watt |
| 944-CE 2't | 946-CE 2't | 2' | 20 Watt |

WINGED-BACK REFLECTOR FIXTURES have a streamlined decorative appearance. They are for strip and other decorative lighting.



| Catalog No. | | Nominal Length | Lamps Required |
|-----------------|--------------|----------------|-------------------|
| Decorative Type | Economy Type | | |
| 952-C 1 1/2' | 954-C 1 1/2' | 18" | 15 Watt |
| 952-C 2' | 954-C 2' | 2' | 20 Watt |
| 952-C 3' | 954-C 3' | 3' | 30 Watt |
| 952-C 4' | 954-C 4' | 4' | 40 Watt |
| 952-C* 2' | 954-C* 2' | Continuous | 2 or more 40 Watt |
| 952-CE 2't | 954-CE 2't | 2' | 20 Watt |

REFLECTORLESS FIXTURES are the simplest type of bare lamp unit. They are suitable for certain strip lighting and decorative application.



| Catalog No. | | Nominal Length | Lamps Required |
|-----------------|--------------|----------------|-------------------|
| Decorative Type | Economy Type | | |
| 954-C 1 1/2' | 956-C 1 1/2' | 18" | 15 Watt |
| 954-C 2' | 956-C 2' | 2' | 20 Watt |
| 954-C 3' | 956-C 3' | 3' | 30 Watt |
| 954-C 4' | 956-C 4' | 4' | 40 Watt |
| 954-C* 2' | 956-C* 2' | Continuous | 2 or more 40 Watt |
| 954-CE 2't | 956-CE 2't | 2' | 20 Watt |


*Order by Catalog No. following by length of run required, multiples of 4' only. For example: 940-C 12 ft.
†2 ft. extension section only for use with continuous fixtures made up of 4-ft. lengths.

FLUORESCENT CURTISTRIP

FOOTCANDLE CHARTS, HANGERS, LIGHTSTRIP

DEEP REFLECTOR


Maintained Foot-Candles* on Horizontal Plane
For One 40-Watt White Lamp. Also Continuous Section

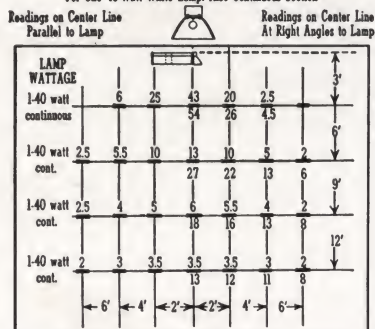

*These maintained foot-candle values include a 25% depreciation factor which allows for normal aging of lamps and reduction of light output due to collection of dust.

ASYMMETRIC REFLECTOR


Maintained Foot-Candles* on Wall or Vertical Plane
For One 40 Watt White Lamp. Also Continuous Run

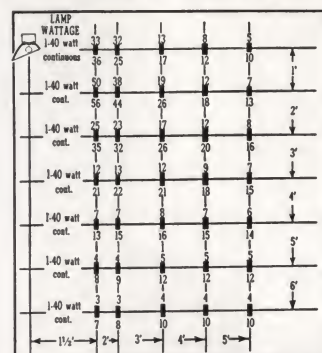

*These maintained foot-candle values include a 25% depreciation factor which allows for normal aging of lamps and reduction of light output due to collection of dust.

SHALLOW REFLECTOR

Maintained Foot-Candles* on Horizontal Plane

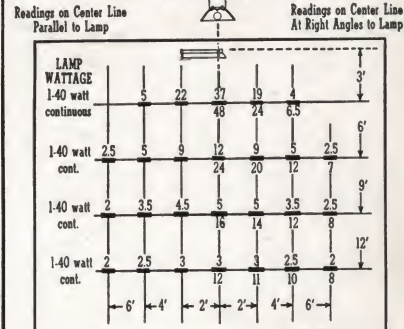

*These maintained foot-candle values include a 25% depreciation factor which allows for normal aging of lamps and reduction of light output due to collection of dust.


Charts above show *maintained* values using 2100 lumen white lamps, and include a depreciation factor of 25% which allows for normal aging of lamps and

collection of dust. When the "Deep" reflector is used for general lighting compute footcandles from Co-efficients on the previous page.

HANGERS AND FITTINGS

| | | |
|--|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | 9 | Strap for holding CurtiStrip. May be used with Fluorescent reflectors. |
| | 611 | Hook fitting. For chain suspension. |
| | 612 | Fittings for 1/2" iron pipe mounting to top of channel. |
| | 613 | Hanger for mounting to outlet box in ceiling; use two hangers for each section of CurtiStrip up to 10 ft. Standard suspension 40" to top of CurtiStrip. May be cut to shorter lengths without threading. |
| | 614 | Hanger with angle fitting for No. 501 end cap. For mounting to outlet box in ceiling for direct or indirect lighting. |
| | 618 | Support. For mounting on vertical surfaces. Connects to side of CurtiStrip channel. Includes 3/8" iron pipe connector, flexible conduit connector and bushing for cord connections. One support is suggested for each 18" or 24" section; two for longer sections. |
| | 615 | Support with angle fitting for No. 501 end cap. |
| | 616 | Support with angle fitting for No. 501 end cap. For mounting to outlet box in wall or other vertical surfaces. Slip-ring style canopy. |
| | 619 | Support. For mounting to outlet box. Connects to side of CurtiStrip channel. One mounting bracket is suggested for each 18" or 24" section; two for longer sections. |
| | 621 | Support. For mounting on top surface of wall case or other horizontal surfaces. Extension is adjustable. |
| | 622 | Support with angle fitting for No. 501 end cap. For mounting on top surface of wall case or side of table or counter. Extension is adjustable. |

LIGHTSTRIP UNITS

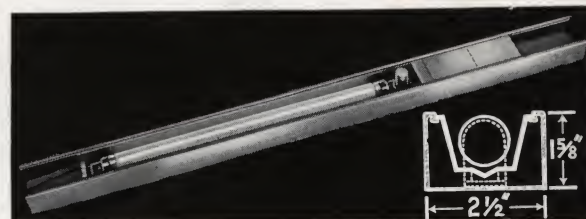


LIGHTSTRIP is the most compact type of Fluorescent CurtiStrip to be used wherever space is at a premium. The wired units listed below are only a few of the possibilities. Since the ballast is housed in the channel itself between reflectors on these units, the light source is not continuous although the wiring channel is continuous. Where LightStrip is wanted with ballasts mounted elsewhere than in the channel or for other possible arrangements, order by parts. Bears Underwriters' Label

| Catalog No. | | Nominal Length | Lamps Required |
|-----------------|--------------|----------------|-----------------|
| Decorative Type | Economy Type | | |
| 269-C 3' | 267-C 3' | 3' | 18" (15 Watt) |
| 269-C 5' | 267-C 5' | 5' | 3' (30 Watt) |
| 269-C 8' | 267-C 8' | 8' | 1-3' (30 Watt) |
| 269-C 10' | 267-C 10' | 10' | 1-18" (15 Watt) |
| 269-CE 10' | 267-CE 10' | 10' | 2-3' (30 Watt) |
| | | | 2-3' (30 Watt) |

All units listed are basic units, complete with ends except 267-CE 10' and 269CE 10' which are extension sections. Long runs are made up with one basic unit and as many extensions as desired.


LIGHTSTRIP UNIT ASSEMBLIES

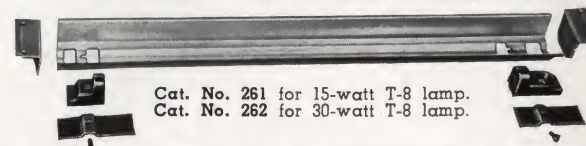

Cat. No. 261 for 15-watt T-8 lamp.
Cat. No. 262 for 30-watt T-8 lamp.

These assemblies are for use in CurtiStrip where space is at a premium. Listed by Underwriters' Laboratories, Inc. Assembly consists of Alzak Aluminum reflector, two ejector type lamp-holders (one a combination lampholder and starter socket), two reflector end plates and miscellaneous parts. Dimensions: Reflector only for No. 261 (18" lamp) requires 21 3/8" of channel space or 23" including reflector end plates. No. 262 (36" lamp) requires 39 3/8" or 41" including reflector end plates. Reflectors can be butted together where desired and reflector end plates used only at ends of unit. Additional space is required for ballasts which is normally carried in the channel between reflectors.

FLUORESCENT CURTISTRIP STOCK PARTS

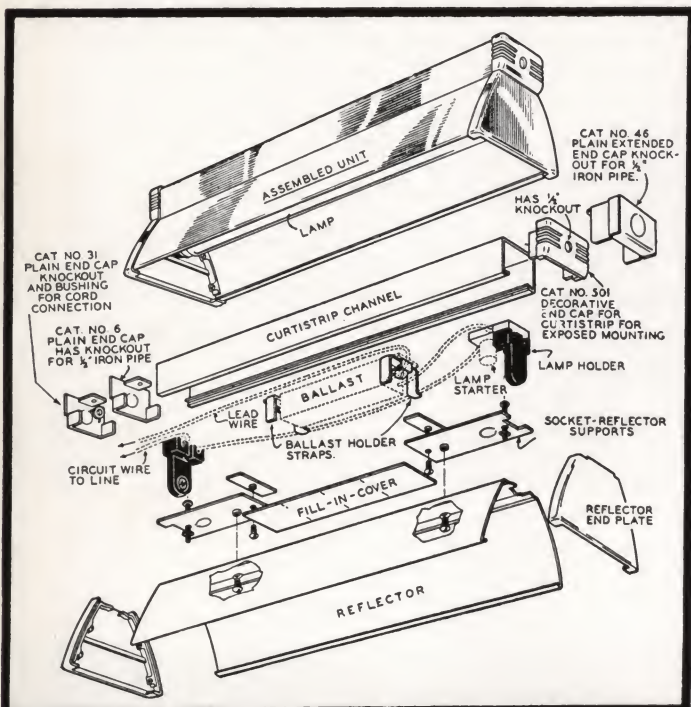

For the exceptional installation (for example, where convenience outlets are to be used between reflectors) it may be desired to construct custom-made fixtures from stock parts.

CURTISTRIP CHANNEL



Channel is available in lengths convenient for use with fluorescent equipment. Channel and covers are made of .040" cold rolled steel, size 2 1/2" wide, 1 3/8" deep. All channel sections have two 1/4" holes 5/8" from the ends in back of channel to facilitate attachment of ends. The plain rust-resisting finish units (except Nos. 1 and 1-A) also have on the back 7/8" knockouts 5" from each end.

| Satin Silvertone Finish | | Plain (zinc plated) Finish | |
|-------------------------|--------|----------------------------|--|
| Cat. No. | Length | Cat. No. | |
| 1-C | 10' | 1-A | |
| 561 | 5' | 581 | |
| 562 | 18" | 591 | |
| 563 | 2' | 593 | |
| 564 | 3' | 596 | |
| 565 | 4' | 597 | |
| 566 | 6' | 598 | |
| 567 | 8' | 599 | |
| 767* | 8' | 799* | |

*Catalog Nos. 767 and 799 have 17 3/8" of channel lip cut out of section permitting use of intermediate cross-section 2 lamp ballasts to be used in CurtiStrip beneath reflectors.

"FLURACITE" REFLECTORS

Made of steel with white "Fluracite" finish, Fluorescent CurtiStrip reflectors are highly efficient.

| Cat. No. | Type | Length | Distribution |
|----------|------------|--------|--------------|
| 245 | Deep | 18" | Semi-Conc. |
| 246 | Deep | 24" | Semi-Conc. |
| 247 | Deep | 36" | Semi-Conc. |
| 248 | Deep | 48" | Semi-Conc. |
| 249 | Asymmetric | 18" | Directional |
| 250 | Asymmetric | 24" | Directional |
| 251 | Asymmetric | 36" | Directional |
| 252 | Asymmetric | 48" | Directional |
| 256 | Shallow | 18" | Distributing |
| 257 | Shallow | 24" | Distributing |
| 258 | Shallow | 36" | Distributing |
| 259 | Shallow | 48" | Distributing |

ALZAK ALUMINUM REFLECTORS


Made of aluminum with diffuse Alzak reflecting surface. Deep type reflectors only.

| Cat. No. | Type | Length | Distribution |
|----------|------|--------|--------------|
| 102 | Deep | 18" | Semi-Conc. |
| 103 | Deep | 24" | Semi-Conc. |
| 104 | Deep | 36" | Semi-Conc. |
| 105 | Deep | 48" | Semi-Conc. |

REFLECTOR END PLATES

These end plates add rigidity and improve appearance. Finished Satin Silvertone.

| Catalog No. | Type |
|-------------|------------------------|
| 502 | Deep |
| 503 | Shallow |
| 504 | Asymmetric (right end) |
| 505 | Asymmetric (left end) |




REFLECTOR CONNECTOR

Catalog No. 129 consists of a soft metal strap which fits over two adjoining sockets and is bent over reflector making a neat joint and preventing light leakage. Used with all type reflectors. Finish: Satin Aluminum.

NOTE: For End Caps, Couplings (for making continuous runs), Ballast Holder Straps, see next page (CurtiStrip Fittings). For Hangers, see preceding page.

Ballasts, lampholders, starter sockets and wire are not made by Curtis Lighting, but can be ordered from the same supplier who sells the Curtis Parts.

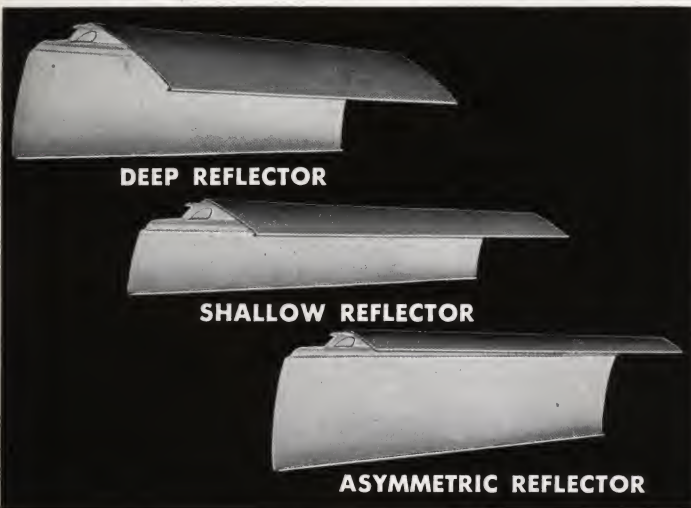

SOCKET REFLECTOR SUPPORTS



Each catalog number consists of a pair of supports. For 15, 20, 30 or 40 watt lamps.

| Catalog No. | Finish |
|-------------|----------------------|
| 782 | Plain Rust-Resisting |
| 788 | Fluracite |

FILL-IN COVER:


Used only on Reflectorless units. The following lengths of fill-in cover are required:

| | |
|----------------------|----------------------|
| 9" for 15-watt lamp | 27" for 30-watt lamp |
| 15" for 20-watt lamp | 39" for 40-watt lamp |

| Cat. No. | Description |
|----------|----------------------------------------|
| 1-B | 10' length plain rust-resisting finish |
| 798* | 39" length white Fluracite finish |

* No. 798 is machine scored at 3" intervals.



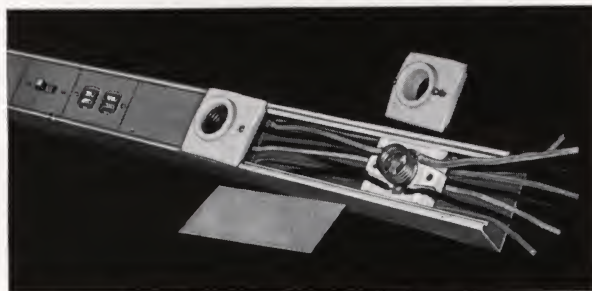













CURTISTRIP CHANNEL AND FITTINGS ALSO "X-RAY" SOCKETS






CurtiStrip channel and fittings are listed by Underwriters' Laboratories, Inc.

CURTISTRIP is a large capacity wiring channel and raceway which facilitates installation of all types of lighting equipment and offers the maximum in convenience and flexibility for carrying current. Fishing of wires is eliminated and outlets can be introduced at any point or transferred as required. The patented snap-in cover can be easily cut to any length and snapped into the lips of the channel. CurtiStrip channel may be cut to length with a hack saw or sections coupled together to form a continuous channel. Zinc-plated finish.

| CAT. NO. | DESCRIPTION | LENGTH |
|--------------|--------------------|-------------|
| Cat. No. 1 | Channel with Cover | 10' lengths |
| Cat. No. 1-A | Channel only | 10' lengths |
| Cat. No. 1-B | Cover only | 10' lengths |

| CURTISTRIP FITTINGS AND ACCESSORIES | | |
|---------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | Cat. No. | DESCRIPTION |
|  | 5 5-A | Porcelain receptacle with shade holder groove. Special porcelain socket (no shade holder groove) for use with "X-Ray" screw engaging holders. |
|  | 6 | End cap to close and finish end of CurtiStrip. Provided with 7/8" knockout for 1/2" conduit (can be reamed to 3/4" for lead-in circuit). |
|  | 9 | Strap for holding CurtiStrip against any flat surface. Overall spread 3 7/8". Holes on 3-5/16" centers. |
|  | 12 | Service box. Top removable. Has four 1 1/8" knockouts (bottom, end, and two sides) for 3/4" conduit. May be reamed up to 1 1/2". |
|  | 13 | Bracket to hang CurtiStrip on pipe or chain hanger. Height top to bottom 3". |
|  | 14 | Elbow adjustable from 70° to 180°. Cover is removable and eliminates fishing of wires. Separable body permits using elbow as splice box. |
|  | 16 | Coupling used for connecting two pieces of CurtiStrip. Does not reduce size of wireway or interfere with use of CurtiStrip sockets. |
|  | 19 19-BX | Nipple attachment (3/8" female thread). Attachment for 1/2" BX or 1/2" socket (with chase nipple). |
|  | 20 | Single receptacle plate. Takes all standard receptacles. |
|  | 21 | Switch plate. Takes standard toggle switch. |
|  | 23 | Duplex receptacle plate. Takes all standard receptacles. |
|  | 24 | Bracket assembly for mounting CurtiStrip out from transom bar or for suspending from ceiling. Includes 3/8" nipple 6 1/4" long with two locknuts and No. 13 Bracket. |
|  | 31 | Plain bushed end cap. For flexible cord connection. Not listed by the Underwriters' Laboratories, Inc. |
|  | 46 | Extended end cap, extends 5/8" beyond end of channel permitting direct conduit connections. |
|  | 181 | Ballast holder strap. Two are needed for each ballast. Can also be used to clamp No. 16 coupling into CurtiStrip without screws. |
|  | 501 | Decorative end cap. Cast in modern tailored design, this end cap gives a finished appearance to unit. Always use No. 501 when unit is to be suspended with hangers having angle fittings. |

"X-RAY" SOCKETS AND RECEPTACLES



| BOX COVER RECEPTACLE UNITS | |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  | For Screw Engaging "X-Ray" Holders only |
| | 10145-B For 3" outlet box |
| | 10146-B For 4" outlet box |
| | With Groove for Clamping Type Holders |
| | 10160-B For 3" outlet box |
| | 10161-B For 4" outlet box |
| METAL SHELL PORCELAIN SOCKETS MEDIUM BASE | |
|  | For Screw Engaging "X-Ray" Holders only |
| | 8251-S With 1/2" side outlet |
| | 8257-B With 1/2" back outlet |
| | With Groove for Clamping Type Holders |
| | 8290-B With 1/2" back outlet |
| | 8291-S With 1/2" side outlet |
| PORCELAIN RECEPTACLES ONLY | |
|  | 8051 With Screw Terminals for "X-Ray" holders. Medium Screw Base. |
| | 8451 With Screw Terminals and groove for clamping type holders. Medium Screw Base. |
| | 8103 With Screw Terminals for "X-Ray" holders. Mogul Screw Base. |

COVE LIGHTING REFLECTORS

Concentrating Type "X-Ray" Cove Reflector No. EC-52

CATALOG NO. 8255


FOR 50-WATT LAMP




A small, powerful Silver Mirror Reflector for projecting light to the center ceiling area. These reflectors may be closely spaced for high intensity cove lighting; minimum spacing is 5 1/4" on centers. By tilting the sockets or wireway, the reflectors may be mounted at any angle necessary to gain the desired light projection. No. 8255 may also be used for direct lighting and many types of panel and display lighting.
Reflector and Holder: Cat. No. 8255. Reflector only: Cat. No. EC-52. Lamp Required: 40- 50- or 60-watt (A-19); 75- or 100-watt (A-21) Lamp. Mounting: For mounting on CurtiStrip with No. 5-A socket, or may be mounted on any of the medium base "X-Ray" sockets shown at left.

INCANDESCENT RECESSED LIGHTING HOUSED UNITS


These units are for general lighting, or for spot and accent lighting. Maximum allowable spacing for good distribution of light with distributing type units is approximately $1\frac{1}{2}$ times the distance of the unit to the working plane. Concentrating reflector units provide a spotlight effect immediately under the unit. Distribution curves for many of these units are given on next page. See Catalog No. tables for key to Curve Nos.



10" Square Pattern Louver as used on square metal housed units.



10" Round Concentric Louver as used on round metal housed units and hinged rim units.

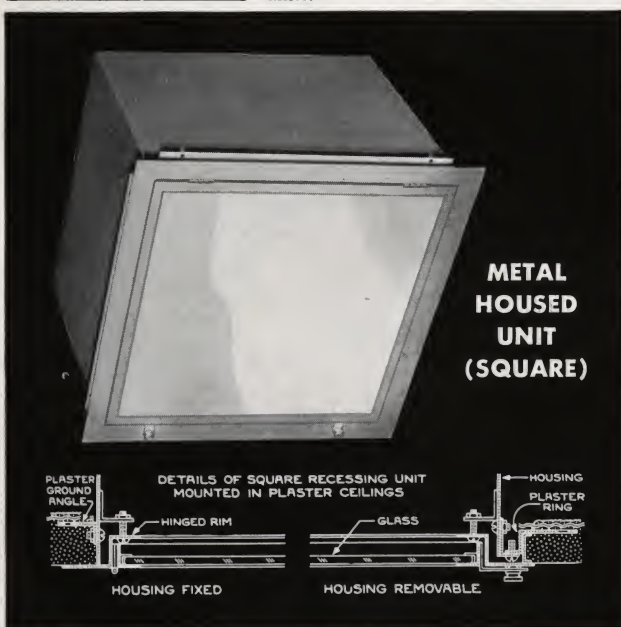

Finish: Satin Gray on the louver and inside of housing, white Fluoracite on the hinged rims. This combination blends well with fluorescent lighting.

Louvers: Concentric type for circular rims; pattern type for square rims.

Glass Lens: Either sanded or crackled finish (crackled finish when used with louvers) on circular rim units; etched for square units.

METAL HOUSED RECESSING UNITS

Deep type recessing units bear Underwriters' Recessing Label and are fitted with "X-Ray" reflectors for maximum efficiency. Shallow type have aluminum interior finish and two sockets arranged to hold lamps in a horizontal position. These do not carry the Underwriters' Recessing Label but are suitable for fireproof and semi-fireproof construction where local inspection will approve. All units individually carton packed.

All housed units are fitted with a hinged rim which holds the louver and glass lens. They can be permanently set into plaster ceilings without plaster rings, but plaster rings should be ordered separately when housing must be removable (for access to wiring).

Large Round Deep Units—for 300-watt* medium base lamps. $15\frac{1}{4}$ " depth required for recessing. Dimensions: Housing $14\frac{1}{2}$ " dia., Lens 14" dia., Louver 14" dia., Rim $17\frac{3}{8}$ " overall.

| Complete Unit No. | Distribution | | Fittings Included |
|-------------------|---------------|-----------|--------------------------|
| | Type | Curve No. | |
| 2307 | Concentrating | 1-B | Crackled glass lens only |
| 2309 | Distributing | 2-B | Crackled glass lens only |
| 2317* | Concentrating | 1-A | Concentric louver only |
| 2318* | Distributing | 2-A | Concentric louver only |
| 2327 | Concentrating | | Lens and louver |
| 2329 | Distributing | | Lens and louver |

Plaster Ring if required is Catalog No. 14038.

* If wanted for 500- or 300-watt lamp, specify No. 2417 in place of 2317 and No. 2418 in place of 2318. These units have mogul sockets and ventilated housing suitable for only fire-resistive construction.

Large Round Shallow Units—For two 150-watt lamps. 6" depth required for recessing. Dimensions: Housing $14\frac{1}{2}$ " dia., Lens 14" dia., Louver 14" dia., Rim $17\frac{3}{8}$ " overall.

| Complete Unit No. | Type | Fittings Included |
|-------------------|--------------|------------------------|
| 2302 | Distributing | Sanded glass lens only |
| 2322 | Distributing | Lens and louver |

Plaster Ring if required is Catalog No. 14038.

Small Round Deep Units—For 200- or 300-watt medium base lamp $12\frac{1}{2}$ " depth required for recessing. Dimensions: Housing $11\frac{3}{16}$ " dia., Lens 10" dia., Louver 10" dia., Rim $12\frac{5}{8}$ " overall.

| Complete Unit No. | Distribution | | Fittings Included |
|-------------------|---------------|-----------|--------------------------|
| | Type | Curve No. | |
| 2304 | Concentrating | 3-B | Crackled glass lens only |
| 2306 | Distributing | 4-B | Sanded glass lens only |
| 2314 | Concentrating | 3-A | Concentric louver only |
| 2315 | Distributing | 4-A | Concentric louver only |
| 2324 | Concentrating | | Lens and louver |
| 2326 | Distributing | | Lens and louver |

Plaster Ring if required is Catalog No. 14037.

Small Round Shallow Units—For two 100-watt lamps. 6" depth required for recessing. Dimensions: Housing $11\frac{3}{16}$ " dia., Lens 10" dia., Louver 10" dia., Rim $12\frac{5}{8}$ " overall.

| Complete Unit No. | Type | Fittings Included |
|-------------------|--------------|------------------------|
| 2301 | Distributing | Sanded glass lens only |
| 2321 | Distributing | Lens and louver |

Plaster Ring if required is Catalog No. 14037.

Square Deep Recessing Units—For 200- or 300-watt medium base lamp. $13\frac{1}{4}$ " depth required for recessing. Dimensions: Housing $10\frac{7}{8}$ " sq., Lens 10" square, Louver 10" square, Rim $13\frac{1}{4}$ " square. These units match Recessed Troffers on page 7.

| Complete Unit No. | Distribution | | Fittings Included |
|-------------------|---------------|-----------|------------------------|
| | Type | Curve No. | |
| 2455 | Distributing | 5-B | Etched glass lens only |
| 2484 | Concentrating | 3-A | Pattern louver only |
| 2485 | Distributing | 5-A | Pattern louver only |
| 2494 | Concentrating | | Lens and louver |
| 2495 | Distributing | | Lens and louver |

Plaster Ring if required is Catalog No. 14042.

Square Shallow Units—For two 100-watt lamps. 6" depth required for recessing. Dimensions: Housing $10\frac{7}{8}$ " sq., Lens 10" sq., Louver 10" sq., Rim $13\frac{1}{4}$ " sq. These units match Recessed Troffers on page 7.

| Complete Unit No. | Type | Fittings Included |
|-------------------|--------------|-------------------------|
| 2451 | Distributing | Etched glass lens only |
| 2491 | Distributing | Lens and pattern louver |


Plaster Ring if required is Catalog No. 14042.

INCANDESCENT RECESSED LIGHTING

HINGED RIM UNITS
ECONOMY UNITS

HINGED RIM UNITS UNHOUSED

Catalog Nos. for hinged units include "X-Ray" reflector, holder, socket and shell, mounting collar, and hinged rim with either cover glass, concentric louver, or both. Individually carton packed, less reflector; reflectors are packed separately. Plaster ground rings are not included but should be ordered separately when units are to be set into a plaster ceiling. These units do not carry Underwriters' Recessing Labels but are suitable for fireproof or semi-fireproof construction where local inspection will approve.




| UNITS | DIMENSIONS | | |
|-------------|------------|---------|---------|
| | A | B | C |
| 2101-A to H | 15 1/8" | 14 1/2" | 17 3/8" |
| 2102-A to H | 12 7/8" | 14 1/2" | 17 3/8" |
| 2103-A to H | 12 7/8" | 14 1/2" | 17 3/8" |
| 2104-B to H | 12 1/2" | 10 5/8" | 12 5/8" |
| 2105-A to H | 11 1/2" | 10 5/8" | 12 5/8" |
| 2106-A to H | 12 7/8" | 10 5/8" | 12 5/8" |
| 2109-B to H | 8 3/4" | 7 7/8" | 9 1/2" |

*Add 1/2" to allow minimum clearance for removal of reflector.
†Add 1 1/2" to allow minimum clearance for removal of reflector.

| | With Glass Lens Only* | With Lens* and Louver | With Louver Only |
|--------------------------------------------------------|------------------------------|-----------------------|-----------------------------|
| 14" size 300 or 500 watts <i>Distributing Type</i> | No. 2101-A Curve No. 2-B | No. 2101-F | No. 2102-H Curve No. 2-A |
| 14" size 300 or 500 watts <i>Concentrating Type</i> | No. 2103-A Curve No. 1-B | No. 2103-F | No. 2103-H Curve No. 1-A |
| 10" size 200 or 300 watts <i>Distributing Type</i> | No. 2104-B* Curve No. 4-B | No. 2104-F | No. 2105-H Curve No. 4-A |
| 10" size 200 or 300 watts <i>Concentrating Type</i> | No. 2106-A Curve No. 3-B | No. 2106-F | No. 2106-H Curve No. 3-A |
| 7" size 100 watts <i>Distributing</i> | No. 2109-B* | No. 2109-F | No. 2109-H |

*Sanded glass lens used on Nos. 2104-B and 2109-B, cracked glass on other units.

PLASTER RINGS: Catalog No. 14038 is plaster ring for 14" size units;
Catalog No. 14034, for 10" size units; Catalog No. 14011 for 7" size units.


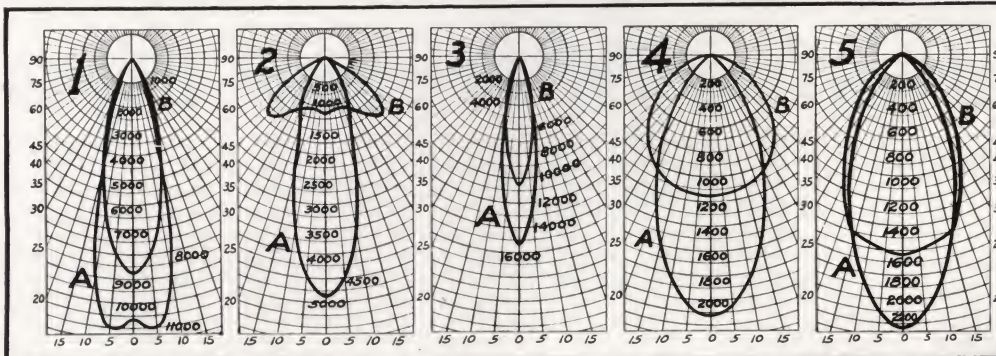


DATA FOR ALL
CURVES OBTAINED
WITH MEDIUM BASE
300-WATT PS-35
INSIDE FROSTED
LAMP

ECONOMY RECESSING UNITS

Open Reflector and Snap-in Louver Types

Complete Unit Nos. include ceiling flange, "X-Ray" Silver Mirror Reflector and socket and shell with side outlet for 1/2" flexible conduit. Nos. 2120-H and 2130-H also include a snap-in concentric louver. No louvers are available for other units. Economy units are not cartoned. These units do not carry Underwriters' Label but are suitable for fireproof and semi-fireproof construction where local inspection will permit. Plaster Ring if required is to be ordered separately.

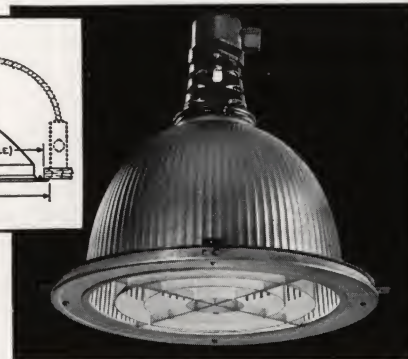


| Complete Unit No. | Reflector Type | Wattage and Distribution | Louver | Flange Cat. No. | DIMENSIONS | | | Plaster Ring (not included) |
|-------------------|----------------|--------------------------|--------|-----------------|------------|---------|---------|-----------------------------|
| | | | | | A* | B | C | |
| 2120-H | 588 | 500 or 300 (distrib.) | Yes | 14025 | 13 3/8" | 12 1/2" | 14 1/2" | 14312 |
| 2122 | 588 | 500 or 300 (distrib.) | No | 14025 | 13 3/8" | 12 1/2" | 14 1/2" | 14312 |
| 2124 | 848 | 500 or 300 (semi-conc.) | No | 14110 | 11 1/8" | 13 3/8" | 15 3/8" | 14111 |
| 2125 | 842 | 500 or 300 (semi-conc.) | No | 14110 | 11 1/8" | 13 3/8" | 15 3/8" | 14111 |
| 2126 | 575 | 200 or 300 (distrib.) | No | 14021 | 10 7/8" | 10" | 12" | 14028 |
| 2127 | 810 | 200 (semi-conc.) | No | 10417 | 9 3/8" | 11 1/8" | 13 1/4" | 14035 |
| 2128 | 804 | 200 or 300 (conc.) | No | 10417 | 11 " | 11 1/8" | 13 1/4" | 14035 |
| 2130-H | 575 | 200 or 300 (distrib.) | Yes | 14021 | 10 7/8" | 10" | 12" | 14028 |
| 2132 | 535 | 100 (distrib.) | No | 14001 | 7 5/8" | 6 3/8" | 7 5/8" | |

* Add 1/2" to allow minimum clearance for removal of reflector from flange.

INCANDESCENT INDUSTRIAL UNITS

WITH "X-RAY" SILVER MIRROR REFLECTORS

No.
588





Recommended for general industrial lighting. Simple to apply and easy and economical to maintain, these units provide excellent vertical illumination and high utilization on the horizontal.

FOR 300- OR 500-WATT PS LAMP

Catalog No. 588 consists of "X-Ray" Silver Mirror Reflector (12" diameter) socket and vibration proof holder. Socket shell has back outlet tapped for 1/2" conduit with 3/8" reducer. Height to top of socket is 14 1/4". Catalog No. 588-T includes a tripod holder with metal retaining ring.

| COEFFICIENTS | | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|----|---|--|
| Ceiling | 75% | | | 50% | | | 30% | | | | |
| Walls | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | | |
| Room Index | J | I | H | G | F | E | D | C | B | A | |
| J | .48 | .45 | .43 | .47 | .45 | .43 | .45 | .42 | | | |
| I | .57 | .55 | .54 | .56 | .54 | .53 | .54 | .52 | | | |
| H | .61 | .60 | .59 | .60 | .59 | .58 | .59 | .57 | | | |
| G | .65 | .64 | .64 | .64 | .62 | .62 | .62 | .61 | | | |
| F | .69 | .67 | .65 | .66 | .65 | .64 | .65 | .63 | | | |
| E | .71 | .70 | .69 | .70 | .69 | .67 | .68 | .67 | | | |
| D | .75 | .73 | .71 | .73 | .71 | .71 | .71 | .70 | | | |
| C | .77 | .75 | .72 | .75 | .73 | .71 | .71 | .71 | | | |
| B | .78 | .76 | .75 | .76 | .74 | .73 | .73 | .72 | | | |
| A | .79 | .77 | .76 | .77 | .75 | .74 | .74 | .73 | | | |

No.
589-T

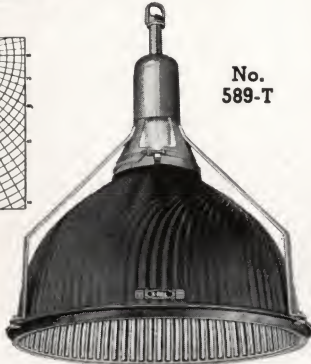


FOR 750- 1000- 1500-WATT PS LAMP (OR 400-WATT MERCURY LAMP)


Catalog No. 589 consists of an "X-Ray" Silver Mirror Glass Reflector (16" diameter), socket and vibration proof holder. Unit is provided with a loop fitting or loop can be discarded for mounting on 1/2" conduit. Height of unit to top of socket is 17 1/2". Catalog No. 589-T includes also a tripod holder with metal retaining ring.

| COEFFICIENTS | | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|----|---|--|
| Ceiling | 75% | | | 50% | | | 30% | | | | |
| Walls | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | | |
| Room Index | J | I | H | G | F | E | D | C | B | A | |
| J | .47 | .45 | .42 | .45 | .44 | .42 | .44 | .41 | | | |
| I | .56 | .53 | .52 | .54 | .53 | .51 | .52 | .50 | | | |
| H | .60 | .59 | .58 | .58 | .57 | .57 | .57 | .56 | | | |
| G | .64 | .63 | .62 | .62 | .61 | .60 | .61 | .59 | | | |
| F | .67 | .65 | .64 | .64 | .63 | .62 | .63 | .61 | | | |
| E | .69 | .68 | .67 | .68 | .67 | .65 | .66 | .65 | | | |
| D | .73 | .71 | .70 | .71 | .70 | .69 | .69 | .68 | | | |
| C | .75 | .73 | .71 | .73 | .71 | .70 | .70 | .69 | | | |
| B | .76 | .74 | .73 | .74 | .72 | .71 | .71 | .70 | | | |
| A | .77 | .76 | .74 | .75 | .73 | .72 | .72 | .71 | | | |

INCANDESCENT SHOW WINDOW UNITS

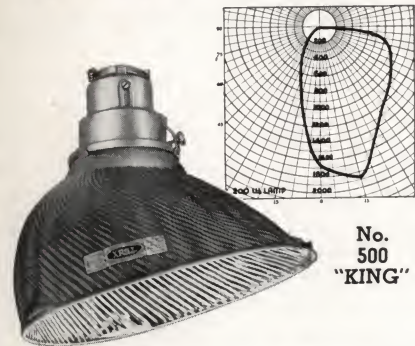

No.
500
"KING"



"X-RAY" Show Window Reflectors are made of crystal glass mirrored with pure silver and protected from deterioration by the famous "Golden Armor" backing.

Use Nos. 420 or 530 for shallow windows, No. 500 for deep windows; for large windows or for super lighting, No. 1010. All these reflectors except No. 500 are of the "Attraction-Zone" type; that is, they concentrate maximum candlepower in the lower portion of the display, the "Attraction-Zone". No. 500 is an angle type reflector designed to illuminate deep windows.

NO. 420—Semi-concentrating reflector for 150- or 100-watt lamp. Less lamp. Adjustable holder included. Louver, extra accessory, is No. 12420 (U-Type). Dimensions: Diameter 8 3/4". Height with Holder 7-9/16".

NO. 530—Semi-concentrating reflector for 300-, 200- or 150-watt medium base incandescent lamp. Adjustable holder included. Louver, extra accessory, is No. 12531 (U Type). Dimensions: Diameter 9 3/4". Height with holder 9-1/16".

NO. 500—Angle type reflector for deep windows. For 300-, 200- or 150-watt medium base incandescent lamp. Ad-



justable holder included. Dimensions: Width 10"; depth, front to back, 10 1/2". Height with holder 10".

NO. 1010—Semi-concentrating reflector for 500- or 300-watt mogul base incandescent lamp. Holder included is No. 10010, 3 3/4" "X-Ray" Holder which fits "X-Ray" mogul sockets only. Socket included No. 8300-B with 1/2" back outlet. Dimensions: Diameter 13". Height with holder and socket 12 3/8".

INSTALLING SHOW WINDOW REFLECTORS

Nos. 420, 500 and 530 have clamping type holders and are usually installed on CurtiStrip using No. 5 socket or on outlet box by means of box cover receptacle unit; when recessing, socket and shell combinations are used.

No. 1010 is installed directly on conduit or on a 1/2" or 3/8" nipple. These units may be recessed with finishing flanges. See below.




RECESSING SHOW WINDOW REFLECTORS

| Reflector No. | Finishing Flange Cat. No. | DIMENSIONS | | | Plaster Ring Cat. No. | DIMENSIONS | |
|---------------|---------------------------|------------|---------|--------|-----------------------|------------------|---------|
| | | A | B† | C | | Minimum Spacing* | "X" |
| 420 | 10517 | 9 1/4" | 8 3/4" | 4 1/2" | 14027 | 10 5/8" | 11 " |
| 500 | 11500 | 11 5/8" | 8" | 4 3/8" | None | | |
| 530 | 14026 | 10 1/2" | 10 " | 5 7/8" | 14028 | 11 3/4" | 12 3/8" |
| 1010 | 14110 | 13 5/8" | 13 1/2" | 5 1/2" | 14111 | 15 1/2" | 15 7/8" |

† Dimension "B" is diameter to cut hole for finishing flange.

* Dimension "X" is distance from front to back of plaster ring, measured on mounting screw hole-centers. † This is overall width of flange. ‡ Asymmetrical opening. Use flange as templet, overall width of flange, 12".



ILLUMINATION DESIGN DATA

GENERAL PROCEDURE

Procedure for use with Coefficient of Utilization charts.

ROOM INDEX

The Room Index table classifies rooms according to width, length, and height of light source. For indirect and semi-indirect luminaires, use the ceiling height. Determine the room index and apply it in the Coefficients of Utilization Table.

COEFFICIENTS OF UTILIZATION

These tables bring together all of the conditions that affect the utilization of light. The figure obtained by reference to this table (for the type of fixtures used, the size and finish of the room in which these are to be installed) is the percentage of the lumens given out by the lamps that reached the working plane. For example, a coefficient of utilization (CU) of .40 means that 40% of the light is useful in producing footcandles and that 60% is absorbed by the walls, ceiling and the fixture itself.

MAINTENANCE FACTOR

Initial footcandles measured when lamps are new and when the equipment is clean will be higher than the average maintained in service. To allow for this, a Maintenance Factor (MF) is given with each Coefficient of Utilization table to indicate the percentage of initial illumination to be expected under reasonable maintenance schedules of cleaning and repainting.

LUMENS AND FOOTCANDLE CALCULATION

The lamp lumens required to light a given area are computed from the formula:

$$\text{Lumens} = \frac{\text{Footcandles} \times \text{Area}}{\text{CU} \times \text{MF}}$$

The average maintained footcandles provided by a lighting system may be computed from the formula:

$$\text{F.C.} = \frac{\text{Total lumens} \times \text{CU} \times \text{MF}}{\text{Area of room}}$$

LUMEN OUTPUT OF LAMPS

| TYPE "F" LAMPS (Fluorescent) | | | | |
|------------------------------|----------|------------|-------------|-------------|
| Watts | Daylight | Soft White | 3500° White | 4500° White |
| 20 | 800 | 700 | 920 | 860 |
| 30 | 1350 | 1170 | 1470 | 1380 |
| 40 | 1920 | 1720 | 2300 | 2100 |
| 40* | | | | 2100 |
| 100 | 3900 | 3300 | 4200 | 4000 |

*Low brightness 60" T12 lamp.

| TYPE "C" LAMPS (Incandescent) | |
|-------------------------------|---------------------------------|
| Watts | Initial Lumens 110-125 volts |
| 200 | 3650 |
| 300 (Medium Base) | 5900 |
| 300 (Mogul Base) | 5650 |
| 500 | 9950 |
| 750 | 15500 |
| 1000 | 21500 |
| 1500 | 33000 |

ROOM INDEX

| CEILING HEIGHT—FEET | | | | | | | | | | | | | |
|-----------------------------------------|--------------------|-----------|------------|-----------|-----------|-----------|----------|----------|----------|----------|----------|---|---|
| For Semi-Indirect and Indirect Lighting | 9 and 9½ | 10 to 11½ | 12 to 13½ | 14 to 15½ | 17 to 20 | 21 to 24 | 25 to 30 | 31 to 36 | 37 to 50 | | | | |
| MOUNTING HEIGHT ABOVE FLOOR—FEET | | | | | | | | | | | | | |
| For Direct and Semi-Direct Lighting | 7 and 7½ | 8 and 8½ | 9 and 9½ | 10 to 11½ | 12 to 13½ | 14 to 15½ | 17 to 20 | 21 to 24 | 25 to 30 | 31 to 36 | 37 to 50 | | |
| Room Width (Feet) | Room Length (Feet) | | ROOM INDEX | | | | | | | | | | |
| 9 (8½-9) | 8-10 | H | I | J | J | | | | | | | | |
| | 10-14 | H | I | I | J | | | | | | | | |
| | 14-20 | G | H | I | J | J | J | | | | | | |
| | 20-30 | G | H | I | J | J | J | | | | | | |
| | 30-42 | F | G | H | I | J | J | J | | | | | |
| 10 (9½-10½) | 42-up | E | F | G | H | I | J | J | | | | | |
| | 10-14 | G | H | I | J | J | J | | | | | | |
| | 14-20 | G | H | I | J | J | J | | | | | | |
| | 20-30 | F | G | H | I | J | J | | | | | | |
| | 30-42 | F | G | H | I | J | J | J | | | | | |
| 12 (11-12½) | 42-60 | E | F | G | H | I | J | J | | | | | |
| | 60-up | E | F | G | H | I | J | J | | | | | |
| | 10-14 | G | H | I | J | J | J | | | | | | |
| | 14-20 | F | G | H | I | J | J | | | | | | |
| | 20-30 | F | G | H | I | J | J | J | | | | | |
| 14 (13-15½) | 30-42 | E | F | G | H | I | J | J | | | | | |
| | 42-60 | E | F | G | H | I | J | J | J | | | | |
| | 60-90 | D | E | F | G | H | J | J | J | J | | | |
| | 90-up | D | E | F | G | H | J | J | J | J | | | |
| | 14-20 | E | F | G | H | I | J | J | | | | | |
| 17 (16-18½) | 20-30 | E | F | G | H | I | J | J | | | | | |
| | 30-42 | E | F | G | H | I | J | J | | | | | |
| | 42-60 | D | E | F | G | H | J | J | J | J | J | | |
| | 60-110 | D | E | F | G | H | J | J | J | J | J | | |
| | 110-up | C | D | E | F | G | H | J | J | J | J | | |
| 20 (19-21½) | 20-30 | D | E | F | G | H | I | J | J | | | | |
| | 30-42 | D | E | F | G | H | I | J | J | J | | | |
| | 42-60 | D | E | F | G | H | I | J | J | J | J | | |
| | 60-90 | C | D | E | F | G | H | I | J | J | J | J | |
| | 90-140 | C | D | E | F | G | H | I | J | J | J | J | J |
| 24 (22-26) | 20-30 | D | E | F | G | H | I | J | J | J | | | |
| | 30-42 | C | D | E | F | G | H | I | J | J | J | | |
| | 42-60 | C | D | E | F | G | H | I | J | J | J | J | |
| | 60-90 | C | D | E | F | G | H | I | J | J | J | J | J |
| | 140-up | C | D | E | F | G | H | I | J | J | J | J | J |
| 30 (27-33) | 30-42 | C | D | E | F | G | H | I | J | J | J | | |
| | 42-60 | C | D | E | F | G | H | I | J | J | J | J | |
| | 60-90 | B | C | C | D | E | F | G | H | I | J | J | J |
| | 90-140 | B | C | C | D | E | F | G | H | I | J | J | J |
| | 140-180 | B | C | C | D | E | F | G | H | I | J | J | J |
| 36 (34-39) | 180-up | B | C | C | D | E | F | G | H | I | J | J | J |
| | 30-42 | B | C | D | E | F | F | F | H | I | J | J | J |
| | 42-60 | A | B | C | D | E | F | F | H | I | J | J | J |
| | 60-90 | A | B | C | C | D | E | F | H | I | J | J | J |
| | 90-140 | A | B | C | C | D | E | F | H | I | J | J | J |
| 42 (40-45) | 140-200 | A | B | C | C | D | E | F | H | I | J | J | J |
| | 200-up | A | B | C | C | D | E | F | H | I | J | J | J |
| | 42-60 | A | B | C | C | D | E | F | H | I | J | J | J |
| | 60-90 | A | B | B | C | D | E | F | H | I | J | J | J |
| | 90-140 | A | B | B | C | D | E | F | H | I | J | J | J |
| 50 (46-55) | 140-200 | A | A | B | C | D | E | F | H | I | J | J | J |
| | 200-up | A | A | B | C | D | E | F | H | I | J | J | J |
| | 42-60 | A | A | B | C | D | E | F | H | I | J | J | J |
| | 60-90 | A | A | B | C | D | E | F | H | I | J | J | J |
| | 90-140 | A | A | A | C | D | E | F | H | I | J | J | J |
| 60 (56-67) | 140-200 | A | A | A | C | D | E | F | H | I | J | J | J |
| | 200-up | A | A | A | C | D | E | F | H | I | J | J | J |
| | 42-60 | A | A | A | B | C | D | E | F | H | I | J | J |
| | 60-90 | A | A | A | B | C | D | E | F | H | I | J | J |
| | 90-140 | A | A | A | B | C | D | E | F | H | I | J | J |
| 75 (68-90) | 140-200 | A | A | A | A | B | C | D | E | F | H | I | J |
| | 200-up | A | A | A | A | B | C | D | E | F | H | I | J |
| | 42-60 | A | A | A | A | B | C | D | E | F | H | I | J |
| | 60-90 | A | A | A | A | B | C | D | E | F | H | I | J |
| | 90-140 | A | A | A | A | B | C | D | E | F | H | I | J |
| 90 or more | 140-200 | A | A | A | A | A | B | C | D | E | F | H | J |
| | 200-up | A | A | A | A | A | B | C | D | E | F | H | J |
| | 42-60 | A | A | A | A | A | B | C | D | E | F | H | J |
| | 60-90 | A | A | A | A | A | B | C | D | E | F | H | J |
| | 90-140 | A | A | A | A | A | B | C | D | E | F | H | J |

Room Index is the classification of a room according to its proportions, large and small rooms of the same proportion have the same index. Hence, for large rooms of dimensions greater than those shown, divide each dimension by the same number and use the index determined for the smaller room.

REPRESENTATIVES

ATLANTA 3, GEORGIA

W. T. Woods, Jr. 231 Healey Building

BALTIMORE 2, MARYLAND

T. H. Bailey, Jr. 614 Garrett Building

(BOSTON AREA)

Needham Heights 94, Mass.
L. S. Cooke 436 Webster Street

CHICAGO SALES OFFICE

600 W. Jackson Blvd. Chicago 6, Illinois

CINCINNATI 8, OHIO

J. W. Morrison 2618 Erie Avenue

CLEVELAND 15, OHIO

J. W. Shively Sweetland Bldg. Room 402

DALLAS 1, TEXAS

Fred H. Simmer Co. 103 Thomas Bldg.

DENVER 2, COLORADO

H. M. Olmstead Co. 1534 Wazee Street

DETROIT 26, MICHIGAN

C. H. Burch 424 Book Building

INDIANAPOLIS 4, INDIANA

H. J. Damm 20 South Capitol

KANSAS CITY 3, KANSAS

H. B. Ewert 5228 Canterbury Road

MILWAUKEE 2, WISCONSIN

H. Q. Beven, 759 N. Milwaukee St., Rm. 204

MINNEAPOLIS 2, MINNESOTA

G. M. Felland 220 So. 10th Street

NEW ORLEANS 18, LOUISIANA

Hutson Colcock 1 Bamboo Road

NEW YORK SALES OFFICE

New York 17, New York
230 Park Avenue New York Central Bldg.

(PHILADELPHIA AREA)

Drexel Hill, Pennsylvania
F. M. Pyle 836 Eaton Road

PITTSBURGH 22, PENNSYLVANIA

R. F. Clark Clark Building Room 1404

ROCHESTER 7, NEW YORK

Ray A. Siedle 662 Monroe Ave.

SAN FRANCISCO 2, CALIFORNIA

J. D. Erikson 100 Hermann Street

SEATTLE 1, WASHINGTON

W. K. Turner Terminal Sales Building

ST. LOUIS 1, MISSOURI

G. C. Law 313 N. 9th Street

• • •


CURTIS LIGHTING OF CANADA, LTD.

Leaside, Toronto 12, Ontario, Canada
195 Wicksteed Avenue

"Eye-Comfort" LUMINAIRES

The Finest in Indirect Lighting

Made of steel, glass and Alzak Aluminum, Curtis "Eye-Comfort" luminaires are famous for beauty and efficiency. All hangers have a self-aligning fitting and high edge canopies, permitting the use of canopy switch (not included). Less lamps.




"DISCUS" LUMINAIRES

For Silvered Bowl Lamps
Low-Priced and Highly Efficient

Catalog No. 1020—For 300* or 500 watt Silvered-bowl lamp. Bowl diameter 20". Suspension to top of bowl 36". Finish: Alzak Aluminum.

*When wanted for use with 300 watt lamp, order also adapter ring, Catalog No. 6055, to center the smaller diameter lamp in the fixture.

Catalog No. 1024—For 750 or 1000 watt Silvered-bowl lamp. Bowl diameter 26". Suspension to top of bowl 48". Finish: Alzak Aluminum.




"EDGE-RAY" LUMINAIRES

The "Edge-Ray" ring at the top of the bowl redirects a portion of light to give a shimmering luminous effect.

Catalog No. 1250—For 300 or 500 watt lamp. Bowl diameter 21½". Suspension to top of bowl 36". Finish: Alzak Aluminum.

Catalog No. 1270—For 750 to 1500 watt lamp. Bowl diameter 27½". Suspension to top of bowl 48". Finish: Alzak Aluminum.




"LARRA" LUMINAIRES

Beauty in shining aluminum and softly luminous opal glass.

Catalog No. 5060—For 300 or 500 watt lamp. Bowl diameter 20". Suspension to top of bowl 36". Finish: Alzak Aluminum.

Catalog No. 5080—For 750 to 1500 watt lamps. Bowl diameter 24". Suspension to top of bowl 42". Finish: Alzak Aluminum.



"WINNER" LUMINAIRE

The secret of its efficiency is the "X-Ray" Silver Mirror Reflector concealed in the bowl.

Catalog No. 5090—For 300 or 500 watt lamp. Bowl diameter 19½". Suspension to top of bowl 36". Finish: Satin Gray.



WALL URN

CATALOG NO. 1548—An "X-Ray" Silver Mirror Reflector finished Bronzed Aluminum in a Satin Aluminum supporting bracket. For 300 or 500 watt lamp. Height 14". Width 13". Projection 13½".

Reflector included is Catalog No. EC-69 which is specially shaped to project light into the room and to minimize side wall splash.

PRINTED IN U. S. A.

SERIAL 2200

CURTIS LIGHTING, INC.

6135 W. 65TH STREET • CHICAGO 38, ILLINOIS

NEW YORK

TORONTO

REPRESENTATIVES

ATLANTA 3, GEORGIA

W. T. Woods, Jr. 231 Healey Building

BALTIMORE 2, MARYLAND

T. H. Bailey, Jr. 614 Garrett Building

(BOSTON AREA)

Needham Heights 94, Mass.

L. S. Cooke 436 Webster Street

CHICAGO SALES OFFICE

600 W. Jackson Blvd. Chicago 6

CINCINNATI 8, OHIO

J. W. Morrison 2618 Erie

CLEVELAND 15, OHIO

J. W. Shively Sweetland Bldg. Re

DALLAS 1, TEXAS

Fred H. Simmer Co. 103 Thom

DENVER 2, COLORADO

H. M. Olmstead Co. 1534 Waze

DETROIT 26, MICHIGAN

C. H. Burch 424 Book D

INDIANAPOLIS 4, INDIANA

H. J. Damm 20 South

KANSAS CITY 3, KANSAS

H. B. Ewert 5228 Canterbur

MILWAUKEE 2, WISCONSIN

H. Q. Beven, 759 N. Milwaukee St.,

MINNEAPOLIS 2, MINNESOTA

G. M. Felland 220 So. 10t

NEW ORLEANS 18, LOUISIANA

Hutson Colcock 1 Bambo

NEW YORK SALES OFFICE

New York 17, New York
230 Park Avenue New York Cent

(PHILADELPHIA AREA)

Drexel Hill, Pennsylvania

F. M. Pyle 836 Eat

PITTSBURGH 22, PENNSYLVANIA

R. F. Clark Clark Building Ro

ROCHESTER 7, NEW YORK

Ray A. Siedle 662 Mont

SAN FRANCISCO 2, CALIFORNIA

J. D. Erikson 100 Herman

SEATTLE 1, WASHINGTON

W. K. Turner Terminal Sales

ST. LOUIS 1, MISSOURI

G. C. Law 313 N. 9t

• • •

CURTIS LIGHTING OF CANADA

Leaside, Toronto 12, Ontario, Can
195 Wicksteed Avenue

"Eye-Comfort" LUMINAIRES

The Finest in Indirect Lighting

Made of steel, glass and Alzak Aluminum, Curtis "Eye-Comfort" luminaires are famous for beauty and efficiency. All hangers have a self-aligning fitting and high edge canopies, permitting the use of canopy switch (not included). Less lamp

Digitized by



ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL
www.apti.org

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:

Mike Jackson, FAIA

... specially shaped to project light into the room and to minimize side wall splash.

PRINTED IN U. S. A.

SERIAL 2200

CURTIS LIGHTING, INC.

6135 W. 65TH STREET • CHICAGO 38, ILLINOIS

NEW YORK

TORONTO